


ACCUPULSE[®] TWINJET[®]
TWIN FLAT SPRAY TIPS



Features & Benefits:

- Non-air induction, twin spray tip that produces highly drift-resistant droplets (XC, UC)
- Patent-pending recirculating design and concave exit orifice geometry provide optimal spray performance
- Specifically designed for use on sprayers equipped with Pulse Width Modulation (PWM) spray tip control
- Optimal for burndown, pre-emerge, and post-emerge systemic applications
- Twin spray pattern allows for improved coverage and canopy penetration
- Compact design fits into tight boom spaces and is less likely to be damaged during field use
- Acetal construction for long wear life and excellent chemical resistance
- Recommended operating pressure range: 20-100 PSI (1.5-7 bar)
- Nine available capacities cover a wide range of application rates and ground speeds
- Can also be used for non-PWM applications, where maximum drift control is desired
- Fits into standard flat spray cap - CP114440A-*CE

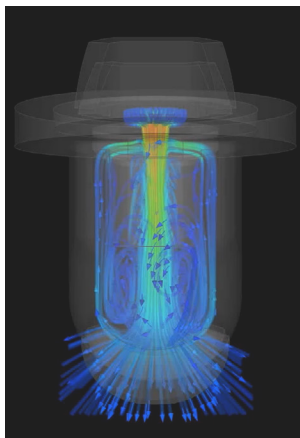

AccuPulse Spray Tip
APTJ-11004VP



AccuPulse Tip/Cap
Assembly -
APTJ-11004VP-CE



APPLICATION INFORMATION

ACCUPULSE® TWINJET® FLAT SPRAY TIPS

Icon	PSI	DROP SIZE	CAPACITY ONE NOZZLE IN GPM	CAPACITY ONE NOZZLE IN OZ/MIN	20"													GALLONS PER 1000 SQ. FT.*			
					GPA*																
					4 MPH	5 MPH	6 MPH	8 MPH	10 MPH	12 MPH	14 MPH	16 MPH	20 MPH	2 MPH	3 MPH	4 MPH	5 MPH				
APTJ-110015VP (100)	20	UC	0.115	15	8.5	6.8	5.7	4.3	3.4	2.8	2.4	2.1	1.7	0.39	0.26	0.20	0.16				
	30	UC	0.134	17	9.9	8.0	6.6	5.0	4.0	3.3	2.8	2.5	2.0	0.46	0.30	0.23	0.18				
	40	UC	0.150	19	11.1	8.9	7.4	5.6	4.5	3.7	3.2	2.8	2.2	0.51	0.34	0.26	0.20				
	50	UC	0.163	21	12.1	9.7	8.1	6.1	4.8	4.0	3.5	3.0	2.4	0.55	0.37	0.28	0.22				
	60	XC	0.175	22	13.0	10.4	8.7	6.5	5.2	4.3	3.7	3.2	2.6	0.60	0.40	0.30	0.24				
	70	XC	0.185	24	13.7	11.0	9.2	6.9	5.5	4.6	3.9	3.4	2.7	0.63	0.42	0.31	0.25				
	80	XC	0.195	25	14.5	11.6	9.7	7.2	5.8	4.8	4.1	3.6	2.9	0.66	0.44	0.33	0.27				
	90	XC	0.204	26	15.1	12.1	10.1	7.6	6.1	5.0	4.3	3.8	3.0	0.7	0.46	0.35	0.28				
100	XC	0.212	27	15.7	12.6	10.5	7.9	6.3	5.2	4.5	3.9	3.1	0.7	0.48	0.36	0.29					
APTJ-11002VP (100)	20	UC	0.15	19	11.1	8.9	7.4	5.6	4.5	3.7	3.2	2.8	2.2	0.51	0.34	0.26	0.20				
	30	UC	0.18	23	13.4	10.7	8.9	6.7	5.3	4.5	3.8	3.3	2.7	0.61	0.41	0.31	0.24				
	40	UC	0.20	26	14.9	11.9	9.9	7.4	5.9	5.0	4.2	3.7	3.0	0.68	0.45	0.34	0.27				
	50	UC	0.22	28	16.3	13.1	10.9	8.2	6.5	5.4	4.7	4.1	3.3	0.75	0.50	0.37	0.30				
	60	UC	0.23	29	17.1	13.7	11.4	8.5	6.8	5.7	4.9	4.3	3.4	0.78	0.52	0.39	0.31				
	70	XC	0.25	32	18.6	14.9	12.4	9.3	7.4	6.2	5.3	4.6	3.7	0.85	0.57	0.43	0.34				
	80	XC	0.26	33	19.3	15.4	12.9	9.7	7.7	6.4	5.5	4.8	3.9	0.88	0.59	0.44	0.35				
	90	XC	0.27	35	20	16.0	13.4	10.0	8.0	6.7	5.7	5.0	4.0	0.9	0.61	0.46	0.37				
100	XC	0.28	36	21	16.6	13.9	10.4	8.3	6.9	5.9	5.2	4.2	1.0	0.63	0.48	0.38					
APTJ-110025VP (100)	20	UC	0.19	24	14.1	11.3	9.4	7.1	5.6	4.7	4.0	3.5	2.8	0.65	0.43	0.32	0.26				
	30	UC	0.22	28	16.3	13.1	10.9	8.2	6.5	5.4	4.7	4.1	3.3	0.75	0.50	0.37	0.30				
	40	UC	0.25	32	18.6	14.9	12.4	9.3	7.4	6.2	5.3	4.6	3.7	0.85	0.57	0.43	0.34				
	50	UC	0.27	35	20	16.0	13.4	10.0	8.0	6.7	5.7	5.0	4.0	0.92	0.61	0.46	0.37				
	60	UC	0.29	37	22	17.2	14.4	10.8	8.6	7.2	6.2	5.4	4.3	1.0	0.66	0.49	0.39				
	70	XC	0.31	40	23	18.4	15.3	11.5	9.2	7.7	6.6	5.8	4.6	1.1	0.70	0.53	0.42				
	80	XC	0.33	42	25	19.6	16.3	12.3	9.8	8.2	7.0	6.1	4.9	1.1	0.75	0.56	0.45				
	90	XC	0.34	44	25	20	16.8	12.6	10.1	8.4	7.2	6.3	5.0	1.2	0.77	0.58	0.46				
100	XC	0.35	45	26	21	17.3	13.0	10.4	8.7	7.4	6.5	5.2	1.2	0.79	0.60	0.48					
APTJ-11003VP (50)	20	UC	0.23	29	17.1	13.7	11.4	8.5	6.8	5.7	4.9	4.3	3.4	0.78	0.52	0.39	0.31				
	30	UC	0.27	35	20	16.0	13.4	10.0	8.0	6.7	5.7	5.0	4.0	0.92	0.61	0.46	0.37				
	40	UC	0.30	38	22	17.8	14.9	11.1	8.9	7.4	6.4	5.6	4.5	1.0	0.68	0.51	0.41				
	50	UC	0.33	42	25	19.6	16.3	12.3	9.8	8.2	7.0	6.1	4.9	1.1	0.75	0.56	0.45				
	60	UC	0.35	45	26	21	17.3	13.0	10.4	8.7	7.4	6.5	5.2	1.2	0.79	0.60	0.48				
	70	XC	0.37	47	27	22	18.3	13.7	11.0	9.2	7.8	6.9	5.5	1.3	0.84	0.63	0.50				
	80	XC	0.39	50	29	23	19.3	14.5	11.6	9.7	8.3	7.2	5.8	1.3	0.88	0.66	0.53				
	90	XC	0.41	52	30	24	20	15.2	12.2	10.1	8.7	7.6	6.1	1.4	0.9	0.70	0.56				
100	XC	0.42	54	31	25	21	15.6	12.5	10.4	8.9	7.8	6.2	1.4	1.0	0.71	0.57					
APTJ-11004VP (50)	20	UC	0.31	40	23	18.4	15.3	11.5	9.2	7.7	6.6	5.8	4.6	1.05	0.70	0.53	0.42				
	30	UC	0.36	46	27	21	17.8	13.4	10.7	8.9	7.6	6.7	5.3	1.2	0.82	0.61	0.49				
	40	UC	0.40	51	30	24	19.8	14.9	11.9	9.9	8.5	7.4	5.9	1.4	0.91	0.68	0.54				
	50	UC	0.43	55	32	26	21	16.0	12.8	10.6	9.1	8.0	6.4	1.5	1.0	0.73	0.58				
	60	UC	0.47	60	35	28	23	17.4	14.0	11.6	10.0	8.7	7.0	1.6	1.1	0.80	0.64				
	70	XC	0.49	63	36	29	24	18.2	14.6	12.1	10.4	9.1	7.3	1.7	1.1	0.83	0.67				
	80	XC	0.52	67	39	31	26	19.3	15.4	12.9	11.0	9.7	7.7	1.8	1.2	0.88	0.71				
	90	XC	0.54	69	40	32	27	20	16.0	13.4	11.5	10.0	8.0	1.8	1.2	0.9	0.73				
100	XC	0.56	72	42	33	28	21	16.6	13.9	11.9	10.4	8.3	1.9	1.3	1.0	0.76					
APTJ-11005VP (50)	20	UC	0.38	49	28	23	18.8	14.1	11.3	9.4	8.1	7.1	5.6	1.3	0.86	0.65	0.52				
	30	UC	0.45	58	33	27	22	16.7	13.4	11.1	9.5	8.4	6.7	1.5	1.02	0.77	0.61				
	40	UC	0.50	64	37	30	25	18.6	14.9	12.4	10.6	9.3	7.4	1.7	1.1	0.85	0.68				
	50	UC	0.55	70	41	33	27	20	16.3	13.6	11.7	10.2	8.2	1.9	1.2	0.94	0.75				
	60	UC	0.59	76	44	35	29	22	17.5	14.6	12.5	11.0	8.8	2.0	1.3	1.0	0.80				
	70	XC	0.63	81	47	37	31	23	18.7	15.6	13.4	11.7	9.4	2.1	1.4	1.1	0.86				
	80	XC	0.66	84	49	39	33	25	19.6	16.3	14.0	12.3	9.8	2.2	1.5	1.1	0.90				
	90	XC	0.69	88	51	41	34	26	20	17.1	14.6	12.8	10.2	2.3	1.6	1.2	0.9				
100	XC	0.72	92	53	43	36	27	21	17.8	15.3	13.4	10.7	2.4	1.6	1.2	1.0					
APTJ-11006VP (50)	20	UC	0.45	58	33	27	22	16.7	13.4	11.1	9.5	8.4	6.7	1.5	1.02	0.77	0.61				
	30	UC	0.53	68	39	31	26	19.7	15.7	13.1	11.2	9.8	7.9	1.8	1.2	0.90	0.72				
	40	UC	0.60	77	45	36	30	22	17.8	14.9	12.7	11.1	8.9	2.0	1.4	1.0	0.82				
	50	UC	0.66	84	49	39	33	25	19.6	16.3	14.0	12.3	9.8	2.2	1.5	1.1	0.90				
	60	UC	0.71	91	53	42	35	26	21	17.6	15.1	13.2	10.5	2.4	1.6	1.2	0.97				
	70	XC	0.76	97	56	45	38	28	23	18.8	16.1	14.1	11.3	2.6	1.7	1.3	1.0				
	80	XC	0.80	102	59	48	40	30	24	19.8	17.0	14.9	11.9	2.7	1.8	1.4	1.1				
	90	XC	0.84	108	62	50	42	31	25	21	17.8	15.6	12.5	2.9	1.9	1.4	1.1				
100	XC	0.88	113	65	52	44	33	26	22	18.7	16.3	13.1	3.0	2.0	1.5	1.2					
APTJ-11008VP (50)	20	UC	0.60	77	45	36	30	22	17.8	14.9	12.7	11.1	8.9	2.0	1.4	1.02	0.82				
	30	UC	0.71	91	53	42	35	26	21	17.6	15.1	13.2	10.5	2.4	1.6	1.2	0.97				
	40	UC	0.80	102	59	48	40	30	24	19.8	17.0	14.9	11.9	2.7	1.8	1.4	1.1				
	50	UC	0.88	113	65	52	44	33	26	22	18.7	16.3	13.1	3.0	2.0	1.5	1.2				
	60	UC	0.95	122	71	56	47	35	28	24	20	17.6	14.1	3.2	2.2	1.6	1.3				
	70	XC	1.02	131	76	61	50	38	30	25	22	18.9	15.1	3.5	2.3	1.7	1.4				
	80	XC	1.08	138	80	64	53	40	32	27	23	20	16.0	3.7	2.4	1.8	1.5				
	90	XC	1.13	145	84	67	56	42	34	28	24	21	16.8	3.8	2.6	1.9	1.5				
100	XC	1.18	151	88	70	58	44	35	29	25	22	17.5	4.0	2.7	2.0	1.6					
APTJ-11010VP (50)	20	UC	0.74	95	55	44	37	27	22	18.3	15.7	13.7	11.0	2.5	1.7	1.3	1.01				
	30	UC	0.88	113	65	52	44	33	26	22	18.7	16.3	13.1	3.0	2.0	1.5	1.2				
	40	UC	1.00	128	74	59	50	37	30	25	21	18.6	14.9	3.4	2.3	1.7	1.4				
	50	UC	1.10	141	82	65	54	41	33	27	23	20	16.3	3.7	2.5	1.9	1.5				
	60	UC	1.19	152	88	71	59	44	35	29	25	22	17.7	4.0	2.7	2.0	1.6				
	70	XC	1.28	164	95	76	63	48	38	32	27	24	19.0	4.4	2.9	2.2	1.7				
	80	XC	1.35	173	100	80	67	50	40	33	29	25	20	4.6	3.1	2.3	1.8				
	90	XC	1.43	183	106	85	71	53	42	35	30	27	21	4.9	3.2	2.4	1.9				
100	XC	1.49	191	111	89	74	55	44	37	32	28	22	5.1	3.4	2.5	2.0					
APTJ-11012VP (50)	20	UC	0.90	115	67	53	45	33	27	22	19.1	16.7	13.4	3.1	2.0	1.53	1.22				
	30	UC	1.06	136	79	63	52	39	31	26	22	19.7	15.7	3.6	2.4						