

TeeJet® TIP STRAINERS



STRAINERS

Strainers protect spray tip orifices from clogging and damage. Stainless steel screens are available in 24, 50, 80, 100 and 200 mesh.

MESH SIZE
16
20
24
25/30
50/60
80
100
120
200


Note: Strainers color code follows the ISO 19732 standards.

TEEJET STRAINER NUMBER	STRAINER BODY & CAP MATERIAL	MESH SCREEN MATERIAL
8079-PP-*	Polypropylene	Stainless Steel
5053-SS	Brass	Stainless Steel
6051-SS-*	Stainless Steel	Stainless Steel

*Specify mesh size when ordering.

55215 SELF-RETAINING TIP STRAINER

For use with Quick TeeJet caps. Allows tip strainer to be easily removed from nozzle body for cleaning. 50 or 100 mesh color-coded strainer with optional EPDM or FKM gasket.



HOW TO ORDER

55215-50-EPR, EPDM gasket
55215-50-VI, FKM gasket

STRAINER NUMBER	MESH
55215-50-*	50
55215-100-*	100

*Identify gasket material.

SLOTTED STRAINERS

One-piece strainers for use with liquids containing suspended solids.



TEEJET STRAINER NUMBER	AVAILABLE MATERIAL	EQUIVALENT TO MESH SIZE	COLOR CODE (NYLON VERSIONS ONLY)
4514-10	Brass or Nylon	50	50
4514-20	Brass, Aluminum or Nylon	25	25
4514-32	Brass, Aluminum or Nylon	16	16

*Above numbers for brass. For Nylon add "NY". For aluminum add "AL".

4193A & 4193B STRAINER & CHECK VALVE

Minimizes nozzle dripping; fits with all TeeJet Nozzle Bodies. 4193B offered with a choice of 5 PSI or 10 PSI, 4193A offered with a choice of 20 PSI or 40 PSI spring. Recommended for flow rates up to 0.8 GPM. 24, 50, 100 and 200 mesh screens. Not for use with AI, DG, or TTI tips.



Note: Use of these ball check valves results in a pressure drop equivalent to the opening pressure rating.

CHECK VALVE NUMBER	BODY & CAP SCREW MATERIAL	MESH SCREEN MATERIAL	BALL MATERIAL
4193A/B- * - *	Brass	Stainless Steel	Stainless Steel
4193A/B-SS- * - *	Stainless Steel	Stainless Steel	Stainless Steel
4193A/B-PP- * - *	Polypropylene	Stainless Steel	FKM
4193A/B-PP-SS-*	Polypropylene	Stainless Steel	Stainless Steel

*When ordering, specify A or B, spring rating and screen mesh size.

TeeJet® LINE STRAINERS

The AA122 line strainer features a compact size that is well suited for small agricultural and turf sprayers. The AA122 is constructed of a polypropylene head and bowl with stainless steel screen for excellent chemical resistance and is available with 1/2" or 3/4" (F) NPT pipe connections.

The maximum pressure rating is 150 PSI. A Quick Connect version of the 122 is also available for easy installation on valves/manifolds equipped with Quick Connect outlets. The maximum pressure rating for this version is 215 PSI.



37270-122-PP

The screen may be periodically flushed by opening a valve (valve not included) in flush-out line.

STRAINER NUMBER	PIPE CONN.	APPROXIMATE FLOW RATE WITH 5 PSI PRESSURE DROP IN GPM	SCREEN	
			MESH SIZE	PART NUMBER
AA122ML-QC-PP-*	QC	18		
AA(B)122-1/2-PP-*	1/2"	12	16	CP23174-1-304SS
AA(B)122-3/4-PP-*	3/4"	16	30	CP23174-2-304SS
AA(B)122ML-1/2-PP-*	1/2"	12	50	CP45102-3-SSPP
AA(B)122ML-3/4-PP-*	3/4"	16	80	CP45102-4-SSPP
(B)37270-122-1/2-PP-*	1/2"	12	100	CP45102-5-SSPP
(B)37270-122-3/4-PP-*	3/4"	16	200	CP23174-7-304SS

* = Mesh Size

Replacement Head Gasket: CP23173-EPR(-VI) or CP7717-M38x4-VI (for AA122ML-QC only).

Note: Strainers color code follows the ISO 19732 standards.

(B) = BSPT



AA126ML-F50



AA126ML-3 or -4

AA126 FLUSH-OUT LINE STRAINER

- 200 PSI maximum pressure rating.
- Strainer head and bowl are made of glass-filled polypropylene with EPDM gasket.
- Screens are made of 304SS with color-coded polypropylene frames and are removable for cleaning.
- Removable cap and O-ring for flush-out or self-cleaning operations.
- Integral mounting provision allows the strainer to be attached to machine using M8 or 5/16" diameter bolts.
- Available with 3/4", 1" NPT or BSPT (F) threads and 50 series flange fitting connections for easy assembly. For information on flange fittings see page 158.
- Uses same screen as the AA124A line strainer.



16903
1.38" O.D.
5.75" Length

STRAINER NUMBER	PIPE/FLANGE CONNECTION (F)	FLOW RATE WITH 5 PSI PRESSURE DROP	SCREEN	MESH SIZE*
AA(B)126ML-F50-*	50 Series Flange	35 GPM	CP16903-1-SSPP	16
			CP16903-3-SSPP	30
AA(B)126ML-3-*	3/4"	23 GPM	CP16903-4-SSPP	50
			CP16903-5-SSPP	80
AA(B)126ML-4-*	1"	35 GPM	CP16903-6-SSPP	100
			CP16903-7-SSPP	200

*Specify mesh size

Replacement Head Gasket: CP50494-EPR(-VI)

Note: Strainers color code follows the ISO 19732 standards.



AA126ML-F75



AA126ML-5 or -6

AA126 FLUSH-OUT LINE STRAINER

- 200 PSI maximum pressure rating.
- Strainer head and bowl are made of glass-filled polypropylene with EPDM gasket.
- Screens are made of 304SS with color-coded polypropylene frames and are removable for cleaning.
- Removable cap and gasket for flush-out or self-cleaning operations.
- Integral mounting provision allows the strainer to be attached to machine using M10 or 3/8" diameter bolts.
- Available with 1 1/4", 1 1/2" NPT or BSPT (F) threads and 75 series flange fitting connections for easy assembly. For information on flange fittings see page 158.
- Uses same screen as the AA124 line strainer.



15941
2.25" O.D.
7.63" Length

STRAINER NUMBER	PIPE/FLANGE CONNECTION (F)	FLOW RATE WITH 5 PSI PRESSURE DROP	SCREEN	MESH SIZE*
AA(B)126ML-F75-*	75 Series Flange	77 GPM	CP15941-1-SSPP	16
			CP15941-2-SSPP	30
AA(B)126ML-5-*	1 1/4"	59 GPM	CP15941-3-SSPP	50
			CP15941-4-SSPP	80
AA(B)126ML-6-*	1 1/2"	77 GPM	CP15941-5-SSPP	100
			CP15941-6-SSPP	120

*Specify mesh size

Replacement Head Gasket: CP48656-EPR(-VI)

Note: Strainers color code follows the ISO 19732 standards.

SELF-CLEANING LINE STRAINERS

The TeeJet self-cleaning strainer extends your spraying time with a self-cleaning feature that minimizes clogging. Mounted on the discharge side of the pump, the strainer uses excess pump flow to bypass clogging particles back to the spray tank.

The tapered inner cylinder inside the entire length of the screen provides a gap between the screen face and the cylinder. This gap causes the inlet fluid to flow at a high velocity past the screen face providing for a continuous wash down of particles to the bypass line. In order for the wash down to occur, a minimum flow rate of 6 GPM for ¾" and 1" sizes and 8 GPM for 1¼" and 1½" sizes is required through the bypass line.

- Available with or without mounting lugs.
- AA126 strainers are made of glass filled polypropylene and are available in ¾", 1", 1¼", 1½" (F) NPT or BSPT thread as well as 50 and 75 series flange connection.
- AA124 strainers are made of an aluminum head with a nylon bowl and are available in ¾", 1", 1¼", 1½" (F) NPT or BSPT thread.
- Both use an all stainless steel strainer element.
- Strainers with mounting lugs are designated by "ML".



AA(B)126MLSC
(Glass-filled Polypropylene)



AA(B)124ML-SC-AL
(Aluminum)



AA(B)124-SC-AL
(Aluminum)

STRAINER NUMBER	PIPE CONN.	BYPASS PIPE CONN.	MATERIAL		MAX. PRESSURE (PSI)	MIN. BYPASS REQUIRED (GPM)	SCREEN	
			HEAD	BOWL			MESH	NUMBER
AA(B)126MLSC-3-*	¾" (F)		Polypropylene		200	6	16	CP12285-*SS
AA(B)124ML-3/4-SC-AL-*			Aluminum	Nylon	150		30	
AA(B)126MLSC-4-*	1" (F)	½" (F)	Polypropylene		200	50	80	
AA(B)124ML-1-SC-AL-*			Aluminum	Nylon	150			
AA(B)126MLSC-50F-*	Flange		Polypropylene		200	8	100	CP12290-*SS
AA(B)126MLSC-5-*	1¼" (F)		Polypropylene		200			
AA(B)124ML-1-1/4-SC-AL-*			Aluminum	Nylon	150	30		
AA(B)126MLSC-6-*	1½" (F)	¾" (F)	Polypropylene		200	100		
AA(B)124ML-1-1/2-SC-AL-*			Aluminum	Nylon	150			30
AA(B)126MLSC-75F-*	Flange		Polypropylene		200			

Replacement Head Gaskets: 126-3, -4, -F50: CP50494-EPR (-VI); 126-5, -6, -F75: CP48656-EPR (-VI); 124-3/4, -1: CP7717-2-226-VI; 124-1-1/4, -1-1/2: CP12291-VI

STRAINER NUMBER	PIPE CONN.	BYPASS PIPE CONN.	MATERIAL		MAX. PRESSURE (PSI)	MIN. BYPASS REQUIRED (GPM)	SCREEN	
			HEAD	BOWL			MESH	NUMBER
AA(B)124A-3/4-SC-AL-*	¾" (F)	½" (F)	Aluminum	Nylon	150	6	16	CP12285-*SS
AA(B)124A-1-SC-AL-*							30	
AA(B)124-1-1/4-SC-AL-*	80							
AA(B)124-1-1/2-SC-AL-*	100							
AA(B)124-1-1/2-SC-AL-*	1½" (F)	¾" (F)				8	30	CP12290-*SS
AA(B)124-1-1/2-SC-AL-*	1½" (F)						80	
AA(B)124-1-1/2-SC-AL-*	1½" (F)						100	

HOW TO ORDER

AA126MLSC-4-50

Specify strainer number.

CP12285-1-SS

To order screen only, specify screen number.


SCREEN		
MESH	SCREEN NUMBER	SCREEN NUMBER
16	CP12285-1-SS	CP12290-1-SS
30	CP12285-4-SS	CP12290-2-SS
50	CP12285-2-SS	CP12290-3-SS
80	CP12285-3-SS	CP12290-4-SS
100	CP12285-6-SS	CP12290-8-SS



12285
1.37" O.D.
5.75" Length



12290
2.25" O.D.
7.94" Length

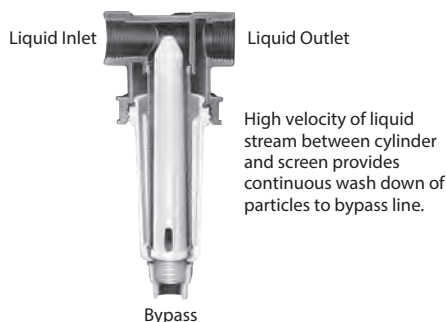

Strainer heads are available in aluminum and cast iron. Bowl material is Nylon. Each strainer includes stainless steel screen (with polypropylene frames on 3/4" to 1 1/2" pipe sizes). Maximum temperatures up to 100°F. FKM O-ring seal supplied with 3/4" and 1" models; Buna-N gaskets supplied with 1 1/4", 1 1/2", 2" and 2 1/2" sizes. FKM optional.



AA(B)124A-AL



16903
1.38" O.D.
5.75" Length



AA(B)124-AL



15941
2.28" O.D.
7.63" Length



14634
3.19" O.D.
9.75" Length



AA(B)124ML-AL
(with mounting holes)



16903
1.38" O.D.
5.75" Length



15941
2.25" O.D.
7.63" Length



14634
3.19" O.D.
9.75" Length

HOW TO ORDER

AA(B)124-1-1/4-NYB-16 (Nylon)

Specify strainer number, mesh size and material.

CP15941-1-SSPP

To order screen only, specify screen number.

STRAINER NUMBER	PIPE CONN.	APPROXIMATE FLOW RATE WITH 5 PSI PRESSURE DROP IN GPM	PRESSURE RATING PSI	SCREEN	
				MESH SIZE	PART NUMBER
AA(B)124A-3/4-AL*	3/4"	23	150	16	CP16903-1-SSPP
				20	CP16903-2-SSPP
				30	CP16903-3-SSPP
				50	CP16903-4-SSPP
AA(B)124A-1-AL*	1"	34	150	80	CP16903-5-SSPP
				100	CP16903-6-SSPP
				200	CP16903-7-SSPP

* = Mesh Size

(B) = BSPT

Replacement Head O-Ring: CP7717-2-226-EPR

STRAINER NUMBER	PIPE CONN.	APPROXIMATE FLOW RATE WITH 5 PSI PRESSURE DROP IN GPM	PRESSURE RATING PSI	SCREEN	
				MESH SIZE	PART NUMBER
AA(B)124-1-1/4-AL*	1 1/4"	60	150	16	CP15941-1-SSPP
				30	CP15941-2-SSPP
				50	CP15941-3-SSPP
AA(B)124-1-1/2-AL*	1 1/2"	70	150	80	CP15941-4-SSPP
				100	CP15941-5-SSPP
AA(B)124-2-AL*	2"	160	150	120	CP15941-6-SSPP
				16	CP14634-1-SS
AA(B)124-2-1/2-AL*	2 1/2"	170	150	30	CP14634-2-SS
				50	CP14634-3-SS
				80	CP14634-4-SS
				100	CP14634-8-SS

* = Mesh Size

(B) = BSPT

Replacement Head Gasket: 124-1-1/4, 1-1/2: CP12291-BU(-VI);
124-2, -2-1/2: CP14833-BU

STRAINER NUMBER	PIPE CONN.	APPROXIMATE FLOW RATE WITH 5 PSI PRESSURE DROP IN GPM	PRESSURE RATING PSI	SCREEN	
				MESH SIZE	PART NUMBER
AA(B)124ML-3/4-AL*	3/4"	23	150	16	CP16903-1-SSPP
				20	CP16903-2-SSPP
				30	CP16903-3-SSPP
				50	CP16903-4-SSPP
AA(B)124ML-1-AL*	1"	34	150	80	CP16903-5-SSPP
				100	CP16903-6-SSPP
				200	CP16903-7-SSPP
AA(B)124ML-1-1/4-AL*	1 1/4"	60	150	16	CP15941-1-SSPP
				30	CP15941-2-SSPP
AA(B)124ML-1-1/2-AL*	1 1/2"	70	150	50	CP15941-3-SSPP
				80	CP15941-4-SSPP
AA(B)124ML-2-AL*	2"	160	150	100	CP15941-5-SSPP
				120	CP15941-6-SSPP
AA(B)124ML-2-1/2-AL*	2 1/2"	170	150	16	CP14634-1-SS
				30	CP14634-2-SS
				50	CP14634-3-SS
				80	CP14634-4-SS
				100	CP14634-8-SS

* = Mesh Size

(B) = BSPT