



NO. 12795 - LARGE CAPACITY THROTTLING VALVES


THE NO. 12795 - THROTTLING VALVES ARE DESIGNED FOR USE IN ALL APPLICATIONS WHERE METERING OF FLOW OF LIQUID IS REQUIRED.

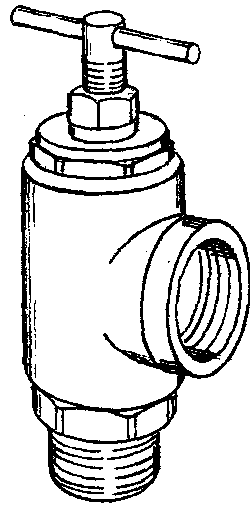

NO. 12795-1

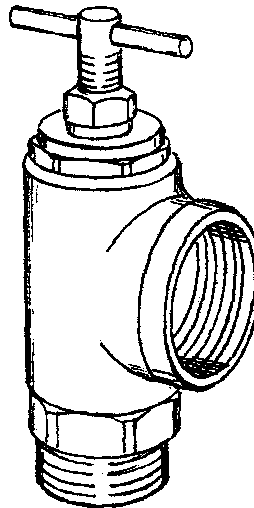

NO. 12795-1/4

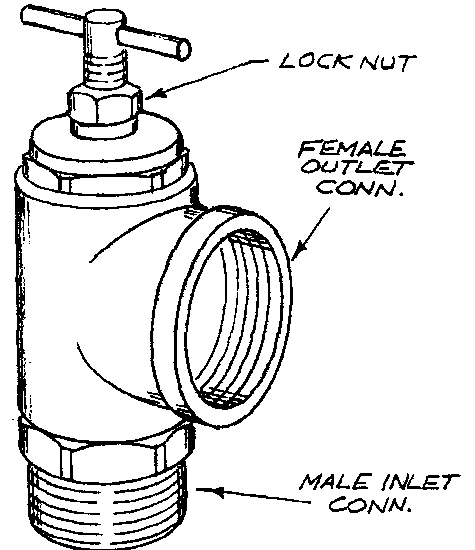

NO. 12795-1/2

CHOICE OF BRASS... ALUMINUM... AND DUCTILE IRON

FEATURES:

- MAXIMUM RECOMMENDED PRESSURE — 150 P.S.I.
- REMOVABLE BONNET FOR SERVICING UNIT WITHOUT REMOVING VALVE FROM LINE.
- STEM LOCK NUT TO MAINTAIN ANY FLOW RATE SETTING.
- LONG TAPERED SEAT TO SMOOTHLY ADJUST DESIRED FLOW RATE.

MODEL NO.	INLET & OUTLET CONN. N.P.T.	MATERIAL	OVERALL LENGTH (APPROX.)
12795-1	1"	BRASS	5 1/2"
12795-1/4	1/4"		
12795-1/2	1/2"		
12795-1-DI	1"	DUCTILE IRON	5 3/4"
12795-1/4-DI	1/4"		
12795-1/2-DI	1/2"		
12795-1-AL	1"	ALUMINUM	5 1/2"
12795-1/4-AL	1/4"		
12795-1/2-AL	1/2"		

FLOW RATES THROUGH VALVES — IN FULLY OPEN SETTING —				
LIQUID PRESSURE IN P.S.I.	10	20	30	40
MAXIMUM FLOW RATE IN G.P.M.	58	82	101	116
	86	122	149	172

**DESCRIPTION:**

**NO. 12795 - LARGE CAPACITY THROTTLING VALVES**



**Spraying Systems Co.<sup>®</sup>**

Spray Nozzles and Accessories  
P.O. Box 7900 - Wheaton, Il. 60187-7900

Rev. No.

Data Sheet No.

**12879**

Ref.

SHEET OF