


PART NUMBER SHOWN: QJ373D-L-1-CM

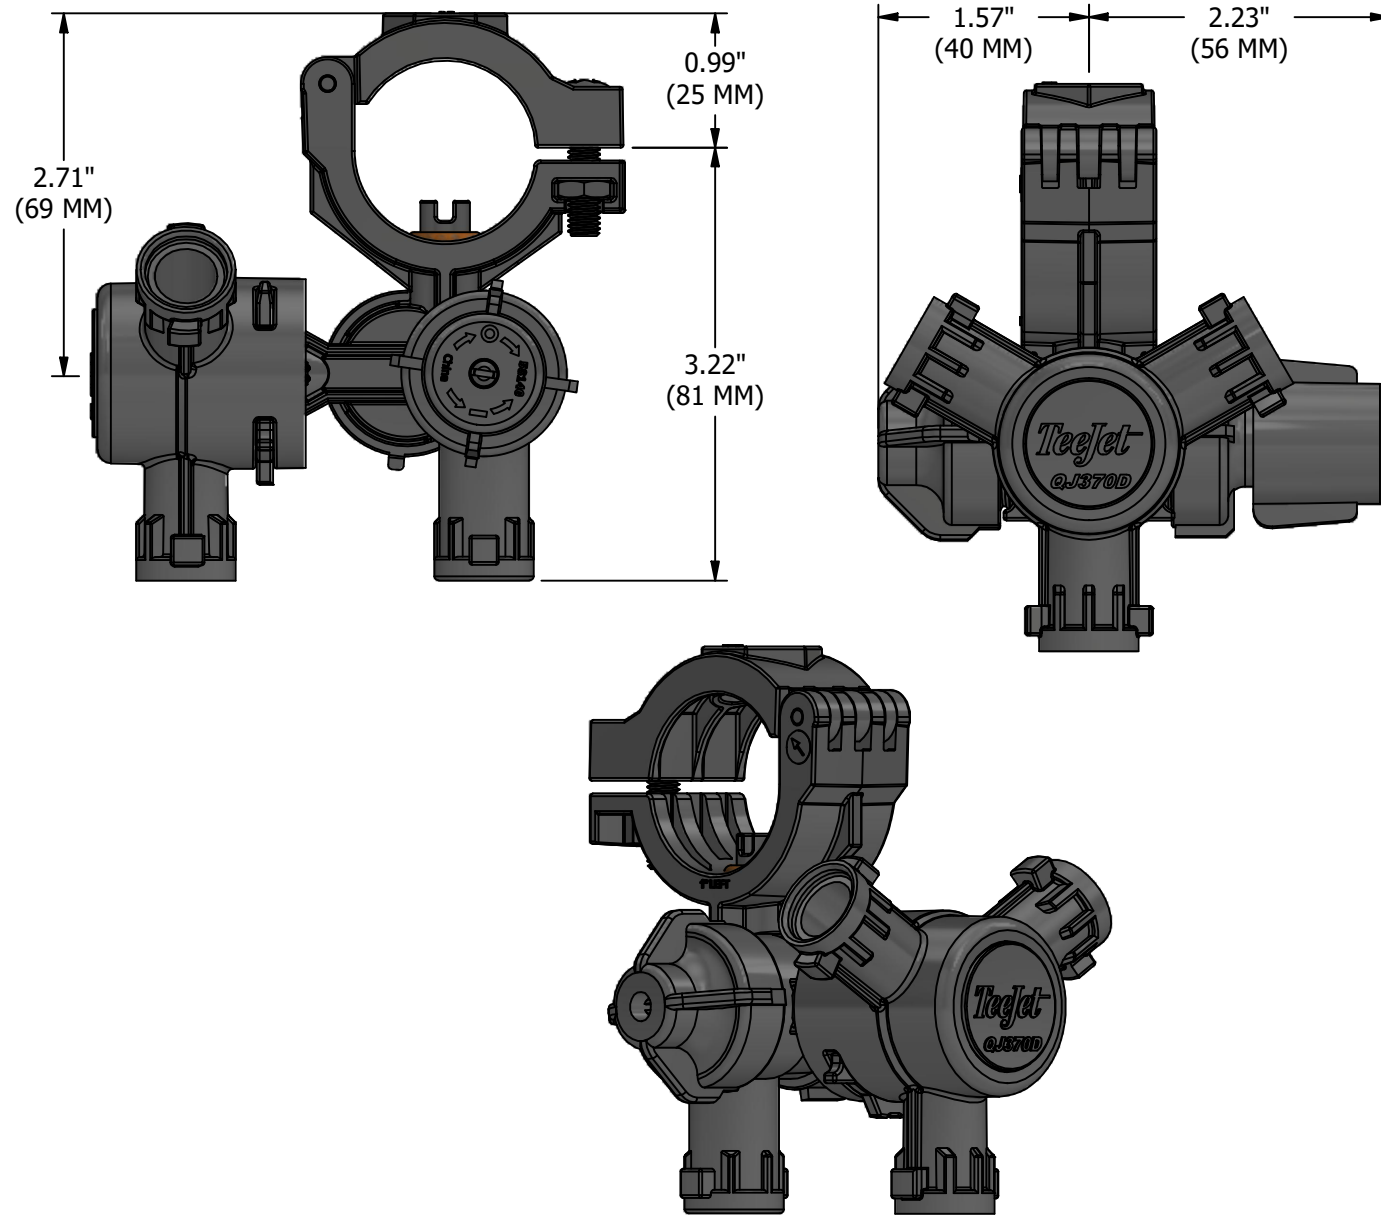

FEATURES


- COMPACT NOZZLE BODY WITH CHOICE OF 3 OR 5 OUTLET TURRETS
- INCLUDES SINGLE HIGH FLOW FERTILIZER OUTLET
- DUAL CHECK VALVE DESIGN USED TO CONTROL TURRET AND FERTILIZER OUTLETS INDIVIDUALLY
- MAXIMUM OPERATING PRESSURE: 300 PSI (20 BAR)
- POSITIVE INDEXING AND SHUT-OFF BETWEEN EACH SPRAY POSITION
- AVAILABLE FOR 1/2", 3/4", AND 1" PIPE, 20MM AND 25MM TUBING
- HINGED UPPER CLAMP AND STAINLESS STEEL BOLT WITH CAPTURED NUT REDUCES INSTALLATION TIME
- 8MM HEX SOCKET ON UPPER CLAMP
- MOUNTS TO 3/8" (9.5MM) HOLE IN TUBING OR PIPE
- 21/32" MOUNTING HOLE OPTION AVAILABLE WITH 1" CLAMP ONLY
- STANDARD O-RINGS MADE OF FKM
- AUTOMATIC SPRAY TIP ALIGNMENT WITH USE OF QUICK TEEJET® CAPS
- CUSTOMIZABLE CHECK VALVE SHUTOFF OPTIONS AVAILABLE
- FOR "HOW TO ORDER" INSTRUCTIONS PLEASE SEE DATA SHEET DS118694

SAMPLE PART NUMBERS

- QJ373D-L-1-CM: THREE OUTLET QUICK TEEJET® RIGHT NOZZLE BODY FOR 1" PIPE, 3/8" (9.5MM) MOUNTING HOLE WITH LEFTMOUNTED STANDARD CHEMSAVER® CHECK VALVE AND RIGHT MOUNTED MANUAL CHEMSAVER
- QJ375D-R-1-XM: 5 OUTLET QUICK TEEJET® RIGHT NOZZLE BODY FOR 1" PIPE, 3/8" (9.5MM) MOUNTING HOLE WITH NO CHEMSAVER® ON RIGHT SIDE AND LEFT MOUNTED MANUAL CHEMSAVER®

QJ373D FLOW RATE		
	FLOW RATE AT 5 PSI PRESSURE DROP	FLOW RATE AT 10 PSI PRESSURE DROP
BOTH OUTLETS	4.1 GPM (15.5 L/MIN)	5.3 GPM (20.0 L/MIN)
BOTTOM OUTLET ONLY	3.0 GPM (11.7 L/MIN)	3.9 GPM (14.8 L/MIN)
TURRET OUTLET ONLY	2.7 GPM (10.2 L/MIN)	3.6 GPM (13.6 L/MIN)

QJ375D FLOW RATE		
	FLOW RATE AT 5 PSI PRESSURE DROP	FLOW RATE AT 10 PSI PRESSURE DROP
BOTH OUTLETS	4.0 GPM (15.1 L/MIN)	5.2 GPM (19.7 L/MIN)
BOTTOM OUTLET ONLY	3.0 GPM (11.3 L/MIN)	3.9 GPM (14.8 L/MIN)
TURRET OUTLET ONLY	2.5 GPM (9.5 L/MIN)	3.4 GPM (12.9 L/MIN)

DESCRIPTION: QJ370D WET BOOM DUAL NOZZLE CONTROL TURRET BODY ASSEMBLY		
	REVISION NO. 2	Data Sheet No. DSQJ370D
	REFERENCE: 012624	SHEET: 1 OF 1 DWG SIZE: B