

# *TeeJet*<sup>®</sup> TECHNOLOGIES



**SPRAY TIP SELECTION GUIDE FOR  
TARGET SPRAY APPLICATIONS**



# INTRODUCTION TO TARGET SPRAY

---

Target spray technology, particularly using green-on-brown or green-on-green systems, is designed to significantly reduce the amount of herbicide applied in an area, potentially achieving up to a 95% reduction compared to traditional broadcast sprayers. This reduction in herbicide usage not only benefits the environment but also minimizes costs for farmers and promotes more sustainable agriculture. The selection of appropriate spray tips is crucial in optimizing the performance of these systems.

There are two main approaches to activating spray tips in target spray technology:

Multiple Spray Tip Activation: Systems that utilize multiple spray tips activated at different times and locations based on weed detection rely on spray tips with tapered spray patterns for precise application. These spray tips are designed to deliver a pattern with a concentrated volume at the center, gradually tapering off toward the edges. This ensures overlapping spray patterns that provide uniform herbicide distribution across the target area. While boom height does not influence the pesticide dose, it plays a critical role in determining the distribution uniformity and minimizing spray drift.

Single Spray Tip Activation: The use of even tips for uniform spray application under one unique tip is crucial for precise herbicide delivery. Even application helps to maximize the effectiveness of the herbicide and minimize the risk of under - or over - application. However, the boom height directly impacts the band width where the herbicide is applied which will directly impact on the applied dose. Consistent and accurate boom heights are essential to ensure proper dose application and minimize spray drift.











Regardless of whether the equipment utilizes a single or multiple spray tip activation, it's essential to calibrate the system to ensure the best performance and savings in weed control. Calibration ensures that the right amount of herbicide is delivered to the target area without over-spraying or under-spraying.

TeeJet offers a wide selection of spray tips, boom components and controllers that are suitable for target spray applications. When choosing the right spray tips, factors like droplet size, flow rate, and spray angle are essential to consider, as they directly impact the precision and effectiveness of herbicide application.

You will find in this TeeJet Spray Selection Guide for Target Spray Application a selection of spray tips that best suit these applications. The guide provides information on different spray tip options and their characteristics, helping users make informed choices based on factors like droplet size, flow rate, spray angle, and other considerations.



# 1. Select the spray tip that most fits your application

SPRAY TIPS & DROPLET SIZE*	POST-EMERGENCE	
	CONTACT	SYSTEMIC
 <b>AI TeeJet<sup>+</sup></b> AI-VS, AI-EVS 		EXCELLENT
 <b>TeeJet<sup>+</sup></b> TP, TP-E 	VERY GOOD	GOOD
 <b>DGX TeeJet<sup>+</sup></b> DGX-SS 		EXCELLENT
 <b>DG TeeJet<sup>+</sup></b> DG-VS 	EXCELLENT	EXCELLENT
 <b>DG TeeJet<sup>+</sup></b> DG-SS 	EXCELLENT	EXCELLENT

Note: Consult the crop protection product label for specific rate and application recommendations. Droplet size categories shown are based on ISO 25358.

\*(VF) Very Fine, (F) Fine, (M) Medium, (C) Coarse, (VC) Very Coarse, (XC) Extremely Coarse, and (UC) Ultra Coarse.

## 2. Calculate the correct spray tip capacity

To determine the right capacity, you must know the work speed, application rate, and spray tip spacing or band width, based on if you will use a tapered or even spray tip.

### Examples:

#### A. For Tapered spray tips – Multiple spray tips activation

$$\text{Formula: GPM} = \frac{\text{GPA} \times \text{MPH} \times \text{W}}{5,940} = \frac{15 \times 12 \times 15}{5,940} = 0.45 \text{ GPM (04 tip @ 50 PSI)}$$




where GPA is the application rate, MPH is the operating speed, **W is the spray tip spacing (in) on the boom**, and 5,940 is the conversion factor.


#### B. For Even spray tips – Single spray tip activation

$$\text{Formula: GPM} = \frac{\text{GPA} \times \text{MPH} \times \text{W}}{5,940} = \frac{15 \times 12 \times 25}{5,940} = 0.75 \text{ GPM (06 tip @ 62.5 PSI)}$$

where GPA is the application rate, MPH is the operating speed, **W is the spray tip band width (in)**, and 5,940 is the conversion factor.

If you are using a single tip, to find the GPA on the spray band, multiply the tabulated GPA from the spray tip page for row spacing by the conversion factors below.

 Width (in)	 Height (in)			GPA Conversion Factors* 		
	40°	65°	80°	10" spacing	15" spacing	20" spacing
3"	4"	2"	2"	3.33	5.00	6.67
6"	8"	5"	3"	1.67	2.50	3.33
8"	11"	6"	5"	1.25	1.88	2.50
10"	14"	8"	6"	1.00	1.50	2.00
12"	16"	9"	7"	0.83	1.25	1.67
15"	21"	12"	9"	0.67	1.00	1.33
20"	27"	16"	12"	0.50	0.75	1.00
25"	35"	20"	15"	0.40	0.60	0.80



**Example:**  
 Spray tip spacing: 10"  
 Band width = 8" (conversion factor = 1.25)  
 TP6503E-SS at 40 PSI at 6 MPH = 30 GPA  
 Corrected GPA = 30 x 1.25 = 47.5 GPA

### 3. Select the adequate nominal angle for the spray tip


Different target spray technologies come with different boom configurations in spray tip spacing and orientation, factors that will impact on the selection of the best angle for the tip. If you are replacing the spray tips on your machine, follow the sprayer manufacturer's recommendations. If you are looking for how to select the proper nominal angle, follow the upcoming steps.

The table below lists the theoretical band width of spray patterns as calculated from the nominal spray angle of the spray and the distance from the tip orifice. These values are based on the assumption that the spray angle remains the same throughout the entire spray distance.

If the desired spray height is not listed at this table, you can find the boom height by selecting an existing tip angle and calculating the boom height by:

$$\text{Tangent} \left( \frac{\text{Spray angle}}{2} \right) = 2 \left( \frac{\text{Theoretical coverage}}{\text{Spray distance}} \right)$$

### Theoretical coverage



INCLUDED SPRAY ANGLE	THEORETICAL COVERAGE AT VARIOUS SPRAY HEIGHTS (IN INCHES)							
	8"	10"	12"	15"	18"	24"	30"	36"
15°	2.1	2.6	3.2	3.9	4.7	6.3	7.9	9.5
20°	2.8	3.5	4.2	5.3	6.4	8.5	10.6	12.7
25°	3.5	4.4	5.3	6.6	8.0	10.6	13.3	15.9
30°	4.3	5.4	6.4	8.1	9.7	12.8	16.1	19.3
35°	5.0	6.3	7.6	9.5	11.3	15.5	18.9	22.7
40°	5.8	7.3	8.7	10.9	13.1	17.5	21.8	26.2
45°	6.6	8.3	9.9	12.4	14.9	19.9	24.8	29.8
50°	7.5	9.3	11.2	14.0	16.8	22.4	28.0	33.6
55°	8.3	10.3	12.5	15.6	18.7	25.0	31.2	37.5
60°	9.2	11.5	13.8	17.3	20.6	27.7	34.6	41.6
65°	10.2	12.7	15.3	19.2	22.9	30.5	38.2	45.8
73°	11.8	14.8	17.8	22.0	27.0	36.0	44.0	53.0
80°	13.4	16.8	20.2	25.2	30.3	40.3	50.4	60.4

## Theoretical coverage


The proper theoretical band width is subject to change based on factors like operating pressure, tip nominal angle, and boom height. This aspect becomes even more critical when considering single tip activation or even tips, as the correct band width is essential for delivering the appropriate crop protection product dose.

In the example below, we can compare the applied dose of a tapered and even spray tip with a 65° angle at the same boom height. Using the same parameters from page 2, for the overlapping tips (tapered), the applied volume rate is calculated using the spray tip spacing of 15", resulting in an application rate of **0.45 GPM** for the tip. Conversely, for the even tip, the applied volume is calculated using the band width of 25", boom height of 20" resulting in an application rate of **0.75 GPM**. When calculating the flow rate parameters for systems with a single spray tip activation, ensure that the spray tip's band width is used as the "w" value in the equation. Using the same 65° spray tip example, at a 20" height provides a theoretical band width of 25". Based on this, the correct calculated capacity for the spray tip would be 0.75 GPM (using an 06 tip at 62.5 PSI), rather than 0.45 GPM, where you would be under-applying by 0.30 GPM .


In the case of multiple tip activation with tapered spray tips, it is strongly suggested to have a minimum overlap of 100%\* to guarantee the accurate delivery of the recommended dose.

When it comes to single tip activation with even spray tips, the general recommendation is to avoid any overlap. However, in practice, it's observed that the edges of even tips may carry less volume. Therefore, a 20% overlap is suggested when more than one tip is activated side by side simultaneously. This slight overlap compensates for the uneven distribution at the edges and helps maintain consistent coverage when using even spray tips. But before deciding if an overlap is needed or not for even spray tips, talk to a TeeJet representative to assist you and understand how you can optimize your application.

Multiple tip activation

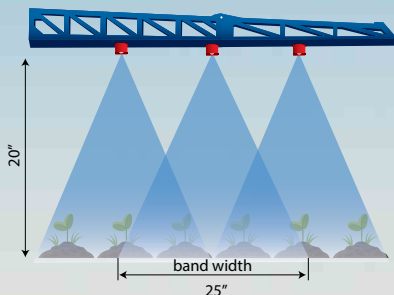

Single tip activation

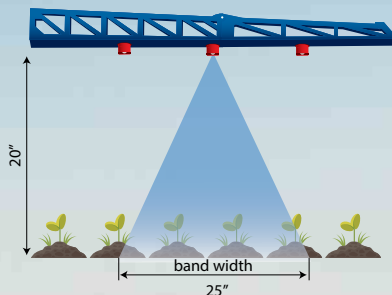

If you use the same spray tip capacity as calculated for a broadcast application for a single spray tip activation, you are under spraying the recommended dose. Let's consider as an example the recommended dose as 15 GPA.

$$\text{GPA} = (0.45 \times 5,940) / (12 \times 25) = 9 \text{ GPA} \quad \times$$

$$\text{GPA} = (0.75 \times 5,940) / (12 \times 25) = 15 \text{ GPA} \quad \checkmark$$

\* Spray tips should be positioned to achieve 100% pattern overlap, with the edge of each spray pattern aligning at the center of the adjacent nozzle.


# TARGET SPRAY APPLICATIONS

DGX TEEJET®

DRIFT GUARD FLAT SPRAY TIPS

## REDUCED DRIFT SPRAY TIP WITH SUPERIOR COVERAGE

The DGX65 is the first spray tip in our line of X Series Target Spray tips. It is designed specifically for precise application and exceptional coverage in target spraying applications. The DGX is now available in a 40° and 65° spray angle with a tapered spray pattern, in 4 capacity sizes, 03-06. The DGX is excellent for herbicide applications in target spraying and is highly versatile.\*

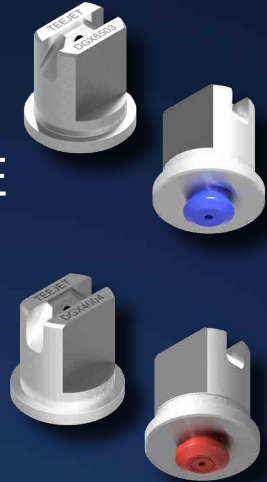

### Features & Benefits

- Designed for multi-nozzle broadcast target spray applications
- Pre-orifice design with VisiFlo® color coding produces large droplets to reduce drift
- DGX TeeJet Drift Guard tips reduce small drift prone droplets, minimizing off target spray contamination
- Increased droplet size compared to the standard DG nozzle



**SERIES**

### USE WITH:



**HERBICIDE**  
**SYSTEMIC**  
**EXCELLENT**



**MATERIALS:**  
**STAINLESS STEEL**



**SPRAY ANGLE:**  
**40° AND 65°**



**PRESSURE:**  
**20-70 PSI**



**SPRAY PATTERN:**  
**TAPERED**



### DROP SIZE CLASSIFICATION:



**VC**  
Very  
Coarse



**XC**  
Extremely  
Coarse





**UC**  
Ultra  
Coarse

\* For more information about our products, please check the complete catalog on our website [www.teejet.com/target-spray](http://www.teejet.com/target-spray)



# DGX SPRAY APPLICATION CHARTS



		DROP SIZE PSI DGX40°	CAPACITY ONE NOZZLE IN GPM	GALLONS PER ACRE (GPA)					
				10"					
				4 MPH	6 MPH	8 MPH	10 MPH	12 MPH	16 MPH
03 (50)	20	UC	0.21	31	21	15.6	12.5	10.4	7.8
	30	UC	0.26	39	26	19.3	15.4	12.9	9.7
	40	UC	0.30	45	30	22	17.8	14.9	11.1
	50	XC	0.34	50	34	25	20	16.8	12.6
	60	XC	0.37	55	37	27	22	18.3	13.7
	70	XC	0.40	59	40	30	24	19.8	14.9
04 (50)	20	UC	0.28	42	28	21	16.6	13.9	10.4
	30	UC	0.35	52	35	26	21	17.3	13.0
	40	UC	0.40	59	40	30	24	19.8	14.9
	50	XC	0.45	67	45	33	27	22	16.7
	60	XC	0.49	73	49	36	29	24	18.2
	70	XC	0.53	79	52	39	31	26	19.7
05 (50)	20	UC	0.35	52	35	26	21	17.3	13.0
	30	UC	0.43	64	43	32	26	21	16.0
	40	UC	0.50	74	50	37	30	25	18.6
	50	XC	0.56	83	55	42	33	28	21
	60	XC	0.61	91	60	45	36	30	23
	70	XC	0.66	98	65	49	39	33	25
06 (50)	20	UC	0.42	62	42	31	25	21	15.6
	30	UC	0.52	77	51	39	31	26	19.3
	40	XC	0.60	89	59	45	36	30	22
	50	XC	0.67	99	66	50	40	33	25
	60	XC	0.73	108	72	54	43	36	27
	70	VC	0.79	117	78	59	47	39	29

## HOW TO ORDER

Stainless Steel with  
VisiFlo color-coding

**DGX6503SS**

Tip Spray Capacity Material  
Type Angle Size Code

		DROP SIZE PSI DGX65°	CAPACITY ONE NOZZLE IN GPM	GALLONS PER ACRE (GPA)						GALLONS PER ACRE (GPA)					
				10"						15"					
				4 MPH	6 MPH	8 MPH	10 MPH	12 MPH	16 MPH	4 MPH	6 MPH	8 MPH	10 MPH	12 MPH	16 MPH
03 (50)	20	UC	0.21	31	21	15.6	12.5	10.4	7.8	21	13.9	10.4	8.3	6.9	5.2
	30	UC	0.26	39	26	19.3	15.4	12.9	9.7	26	17.2	12.9	10.3	8.6	6.4
	40	XC	0.30	45	30	22	17.8	14.9	11.1	30	19.8	14.9	11.9	9.9	7.4
	50	XC	0.34	50	34	25	20	16.8	12.6	34	22	16.8	13.5	11.2	8.4
	60	XC	0.37	55	37	27	22	18.3	13.7	37	24	18.3	14.7	12.2	9.2
	70	VC	0.40	59	40	30	24	19.8	14.9	40	26	19.8	15.8	13.2	9.9
04 (50)	20	UC	0.28	42	28	21	16.6	13.9	10.4	28	18.5	13.9	11.1	9.2	6.9
	30	XC	0.35	52	35	26	21	17.3	13.0	35	23	17.3	13.9	11.6	8.7
	40	XC	0.40	59	40	30	24	19.8	14.9	40	26	19.8	15.8	13.2	9.9
	50	XC	0.45	67	45	33	27	22	16.7	45	30	22	17.8	14.9	11.1
	60	VC	0.49	73	49	36	29	24	18.2	49	32	24	19.4	16.2	12.1
	70	VC	0.53	79	52	39	31	26	19.7	52	35	26	21	17.5	13.1
05 (50)	20	UC	0.35	52	35	26	21	17.3	13.0	35	23	17.3	13.9	11.6	8.7
	30	XC	0.43	64	43	32	26	21	16.0	43	28	21	17.0	14.2	10.6
	40	XC	0.50	74	50	37	30	25	18.6	50	33	25	19.8	16.5	12.4
	50	XC	0.56	83	55	42	33	28	21	55	37	28	22	18.5	13.9
	60	VC	0.61	91	60	45	36	30	23	60	40	30	24	20	15.1
	70	VC	0.66	98	65	49	39	33	25	65	44	33	26	22	16.3
06 (50)	20	UC	0.42	62	42	31	25	21	15.6	42	28	21	16.6	13.9	10.4
	30	XC	0.52	77	51	39	31	26	19.3	51	34	26	21	17.2	12.9
	40	XC	0.60	89	59	45	36	30	22	59	40	30	24	19.8	14.9
	50	VC	0.67	99	66	50	40	33	25	66	44	33	27	22	16.6
	60	VC	0.73	108	72	54	43	36	27	72	48	36	29	24	18.1
	70	VC	0.79	117	78	59	47	39	29	78	52	39	31	26	19.6

Note: Always double check your application rates. Droplet size classification shown is based on ISO 25358. Droplet size classification standard is subject to changes. Tabulations are based on spraying water at 70°F (21°C).

# TARGET SPRAY APPLICATIONS

DG TEEJET®

DRIFT GUARD FLAT SPRAY TIPS



## REDUCED DRIFT SPRAY TIP WITH SUPERIOR COVERAGE

Can be used for contact and systemic herbicide applications that require medium to very coarse droplet size. Available in 30°, 40°, 65° and 80° tapered spray angles ideal for target spray application.\*



### Features & Benefits

- Pre-orifice design produces larger droplets and reduces the small drift-prone droplets, minimizing off-target spray contamination
- Tapered edge flat spray pattern provides uniform coverage when adjacent nozzle patterns are overlapped
- Stainless steel with VisiFlo® color-coding and Stainless Steel

### USE WITH:



#### HERBICIDE

CONTACT

**EXCELLENT**

SYSTEMIC

**EXCELLENT**



**MATERIALS:**  
STAINLESS STEEL



POLYMER




**SPRAY ANGLE:**  
30°, 40°, 65° AND 80°



**PRESSURE:**  
30- 60 PSI



**SPRAY PATTERN:**  
TAPERED



### DROP SIZE CLASSIFICATION:



**F**  
Fine



**M**  
Medium



**C**  
Coarse



**VC**  
Very Coarse







**XC**  
Extremely Coarse



\* For more information about our products, please check the complete catalog on our website [www.teejet.com/target-spray](http://www.teejet.com/target-spray)



# DG SPRAY APPLICATION CHARTS

		DROP SIZE		CAPACITY ONE NOZZLE IN GPM	GALLONS PER ACRE (GPA)						
		PSI	DG30°		DG40°	10"					
						4 MPH	6 MPH	8 MPH	10 MPH	12 MPH	16 MPH
<b>03</b> (50)	30	XC	VC	0.26	39	26	19.3	15.4	12.9	9.7	
	40	VC	VC	0.30	45	30	22	17.8	14.9	11.1	
	50	VC	C	0.34	50	34	25	20	16.8	12.6	
	60	C	C	0.37	55	37	27	22	18.3	13.7	
<b>04</b> (50)	30	XC	VC	0.35	52	35	26	21	17.3	13.0	
	40	VC	VC	0.40	59	40	30	24	19.8	14.9	
	50	C	C	0.45	67	45	33	27	22	16.7	
	60	C	C	0.49	73	49	36	29	24	18.2	

		DROP SIZE	CAPACITY ONE NOZZLE IN GPM	GALLONS PER ACRE (GPA)						GALLONS PER ACRE (GPA)					
				PSI	DG65°	10"						15"			
		4 MPH	6 MPH			8 MPH	10 MPH	12 MPH	16 MPH	4 MPH	6 MPH	8 MPH	10 MPH	12 MPH	16 MPH
<b>055</b> (50)	30	VC	0.48	71	48	36	29	24	17.8	48	32	24	19.0	15.8	11.9
	40	VC	0.55	82	54	41	33	27	20	54	36	27	22	18.2	13.6
	50	VC	0.61	91	60	45	36	30	23	60	40	30	24	20	15.1
	60	C	0.67	99	66	50	40	33	25	66	44	33	27	22	16.6

		DROP SIZE	CAPACITY ONE NOZZLE IN GPM	GALLONS PER ACRE (GPA)						GALLONS PER ACRE (GPA)					
				PSI	DG80°	15"						20"			
		4 MPH	6 MPH			8 MPH	10 MPH	12 MPH	16 MPH	4 MPH	6 MPH	8 MPH	10 MPH	12 MPH	16 MPH
<b>015</b> (100)	30	M	0.13	12.9	8.6	6.4	5.1	4.3	3.2	9.7	6.4	4.8	3.9	3.2	2.4
	40	F	0.15	14.9	9.9	7.4	5.9	5.0	3.7	11.1	7.4	5.6	4.5	3.7	2.8
	50	F	0.17	16.8	11.2	8.4	6.7	5.6	4.2	12.6	8.4	6.3	5.0	4.2	3.2
	60	F	0.18	17.8	11.9	8.9	7.1	5.9	4.5	13.4	8.9	6.7	5.3	4.5	3.3
<b>02</b> (50)	30	C	0.17	16.8	11.2	8.4	6.7	5.6	4.2	12.6	8.4	6.3	5.0	4.2	3.2
	40	M	0.20	19.8	13.2	9.9	7.9	6.6	5.0	14.9	9.9	7.4	5.9	5.0	3.7
	50	M	0.22	22	14.5	10.9	8.7	7.3	5.4	16.3	10.9	8.2	6.5	5.4	4.1
	60	M	0.24	24	15.8	11.9	9.5	7.9	5.9	17.8	11.9	8.9	7.1	5.9	4.5
<b>03</b> (50)	30	C	0.26	26	17.2	12.9	10.3	8.6	6.4	19.3	12.9	9.7	7.7	6.4	4.8
	40	M	0.30	30	19.8	14.9	11.9	9.9	7.4	22	14.9	11.1	8.9	7.4	5.6
	50	M	0.34	34	22	16.8	13.5	11.2	8.4	25	16.8	12.6	10.1	8.4	6.3
	60	M	0.37	37	24	18.3	14.7	12.2	9.2	27	18.3	13.7	11.0	9.2	6.9
<b>04</b> (50)	30	C	0.35	35	23	17.3	13.9	11.6	8.7	26	17.3	13.0	10.4	8.7	6.5
	40	M	0.40	40	26	19.8	15.8	13.2	9.9	30	19.8	14.9	11.9	9.9	7.4
	50	M	0.45	45	30	22	17.8	14.9	11.1	33	22	16.7	13.4	11.1	8.4
	60	M	0.49	49	32	24	19.4	16.2	12.1	36	24	18.2	14.6	12.1	9.1
<b>05</b> (50)	30	C	0.43	43	28	21	17.0	14.2	10.6	32	21	16.0	12.8	10.6	8.0
	40	C	0.50	50	33	25	19.8	16.5	12.4	37	25	18.6	14.9	12.4	9.3
	50	M	0.56	55	37	28	22	18.5	13.9	42	28	21	16.6	13.9	10.4
	60	M	0.61	60	40	30	24	20	15.1	45	30	23	18.1	15.1	11.3

Note: Always double check your application rates. Droplet size classification shown is based on ISO 25358. Droplet size classification standard is subject to changes. Tabulations are based on spraying water at 70°F (21°C).

## HOW TO ORDER

Stainless Steel with VisiFlo color-coding

Stainless Steel

DG8002VS

DG65055-SS

Tip Spray Capacity Material  
Type Angle Size Code

Tip Spray Capacity Material  
Type Angle Size Code

# TARGET SPRAY APPLICATIONS

TP TEEJET®

FLAT SPRAY TIPS

## MULTIPURPOSE SPRAY TIP FOR WHEN COVERAGE IS CRITICAL



A wide range of capacities and spray angles are available to meet your spray volume and droplet size requirements, ensuring optimal performance across various spray boom configurations. Available in 15°, 25°, 30°, 40°, 65°, and 80° spray angles, featuring both tapered and even spray patterns.\*

### Features & Benefits

- Fast Pattern Formation - Faster pattern establishment saves time during spraying operations
- Precision application reduces the need for repeat passes, conserving resources
- High-Quality Stainless Steel provides reliable performance, even under demanding conditions
- Uniform spray patterns ensure even coverage, boosting effectiveness in targeted applications
- Available with Stainless steel and polymer holder with VisiFlo color-coding, VisiFlo® color-coding in stainless steel or all stainless steel



### USE WITH:



#### HERBICIDE

CONTACT

**VERY GOOD**

SYSTEMIC

**GOOD**

**VS** MATERIALS:  
STAINLESS STEEL

**VP** POLYMER



### SPRAY ANGLE:

15°, 25°, 30°, 40°, 65° AND 80°



### PRESSURE:

30 - 60 PSI



### SPRAY PATTERN:

TAPERED AND EVEN

### DROP SIZE CLASSIFICATION:



F

Fine



M

Medium





C

Coarse







VC



Very Coarse



# TP SPRAY APPLICATION CHARTS

		DROP SIZE		CAPACITY ONE NOZZLE IN GPM	GALLONS PER ACRE (GPA)						GALLONS PER ACRE (GPA)						
		PSI	TP40° E		10"			15"			15"			16"			
			4 MPH		6 MPH	8 MPH	10 MPH	12 MPH	16 MPH	4 MPH	6 MPH	8 MPH	10 MPH	12 MPH	16 MPH		
<b>03</b> (50)	30	C	C	0.26	39	26	19.3	15.4	12.9	9.7	26	17.2	12.9	10.3	8.6	6.4	
	40	M	M	0.30	45	30	22	17.8	14.9	11.1	30	19.8	14.9	11.9	9.9	7.4	
	60	M	M	0.37	55	37	27	22	18.3	13.7	37	24	18.3	14.7	12.2	9.2	
<b>04</b> (50)	30	C	C	0.35	52	35	26	21	17.3	13.0	35	23	17.3	13.9	11.6	8.7	
	40	C	C	0.40	59	40	30	24	19.8	14.9	40	26	19.8	15.8	13.2	9.9	
	60	M	M	0.49	73	49	36	29	24	18.2	49	32	24	19.4	16.2	12.1	
<b>05</b> (50)	30	VC	VC	0.43	64	43	32	26	21	16.0	43	28	21	17.0	14.2	10.6	
	40	C	C	0.50	74	50	37	30	25	18.6	50	33	25	19.8	16.5	12.4	
	60	M	M	0.61	91	60	45	36	30	23	60	40	30	24	20	15.1	
<b>06</b> (50)	30	VC	VC	0.52	77	51	39	31	26	19.3	51	34	26	21	17.2	12.9	
	40	C	C	0.60	89	59	45	36	30	22	59	40	30	24	19.8	14.9	
	60	M	M	0.73	108	72	54	43	36	27	72	48	36	29	24	18.1	

		DROP SIZE		CAPACITY ONE NOZZLE IN GPM	GALLONS PER ACRE (GPA)						GALLONS PER ACRE (GPA)						
		PSI	TP65° E		10"			15"			15"			16"			
			4 MPH		6 MPH	8 MPH	10 MPH	12 MPH	16 MPH	4 MPH	6 MPH	8 MPH	10 MPH	12 MPH	16 MPH		
<b>02</b> (50)	30	M	F	0.17	25	16.8	12.6	10.1	8.4	6.3	16.8	11.2	8.4	6.7	5.6	4.2	
	40	F	F	0.20	30	19.8	14.9	11.9	9.9	7.4	19.8	13.2	9.9	7.9	6.6	5.0	
	60	F	F	0.24	36	24	17.8	14.3	11.9	8.9	24	15.8	11.9	9.5	7.9	5.9	
<b>03</b> (50)	30	M	M	0.26	39	26	19.3	15.4	12.9	9.7	26	17.2	12.9	10.3	8.6	6.4	
	40	M	M	0.30	45	30	22	17.8	14.9	11.1	30	19.8	14.9	11.9	9.9	7.4	
	60	F	M	0.37	55	37	27	22	18.3	13.7	37	24	18.3	14.7	12.2	9.2	
<b>04</b> (50)	30	M	M	0.35	52	35	26	21	17.3	13.0	35	23	17.3	13.9	11.6	8.7	
	40	M	M	0.40	59	40	30	24	19.8	14.9	40	26	19.8	15.8	13.2	9.9	
	60	M	M	0.49	73	49	36	29	24	18.2	49	32	24	19.4	16.2	12.1	
<b>05</b> (50)	30	C	C	0.43	64	43	32	26	21	16.0	43	28	21	17.0	14.2	10.6	
	40	M	M	0.50	74	50	37	30	25	18.6	50	33	25	19.8	16.5	12.4	
	60	M	M	0.61	91	60	45	36	30	23	60	40	30	24	20	15.1	
<b>06</b> (50)	30	C	C	0.52	77	51	39	31	26	19.3	51	34	26	21	17.2	12.9	
	40	C	C	0.60	89	59	45	36	30	22	59	40	30	24	19.8	14.9	
	60	M	M	0.73	108	72	54	43	36	27	72	48	36	29	24	18.1	

		DROP SIZE		CAPACITY ONE NOZZLE IN GPM	GALLONS PER ACRE (GPA)						GALLONS PER ACRE (GPA)						
		PSI	TP80° E		15"			20"			20"			16"			
			4 MPH		6 MPH	8 MPH	10 MPH	12 MPH	16 MPH	4 MPH	6 MPH	8 MPH	10 MPH	12 MPH	16 MPH		
<b>015</b> (100)	30	F	F	0.13	12.9	8.6	6.4	5.1	4.3	3.2	9.7	6.4	4.8	3.9	3.2	2.4	
	40	F	F	0.15	14.9	9.9	7.4	5.9	5.0	3.7	11.1	7.4	5.6	4.5	3.7	2.8	
	60	F	F	0.18	17.8	11.9	8.9	7.1	5.9	4.5	13.4	8.9	6.7	5.3	4.5	3.3	
<b>02</b> (50)	30	M	F	0.17	16.8	11.2	8.4	6.7	5.6	4.2	12.6	8.4	6.3	5.0	4.2	3.2	
	40	F	F	0.20	19.8	13.2	9.9	7.9	6.6	5.0	14.9	9.9	7.4	5.9	5.0	3.7	
	60	F	F	0.24	24	15.8	11.9	9.5	7.9	5.9	17.8	11.9	8.9	7.1	5.9	4.5	
<b>03</b> (50)	30	M	M	0.26	26	17.2	12.9	10.3	8.6	6.4	19.3	12.9	9.7	7.7	6.4	4.8	
	40	M	F	0.30	30	19.8	14.9	11.9	9.9	7.4	22	14.9	11.1	8.9	7.4	5.6	
	60	F	F	0.37	37	24	18.3	14.7	12.2	9.2	27	18.3	13.7	11.0	9.2	6.9	
<b>04</b> (50)	30	M	M	0.35	35	23	17.3	13.9	11.6	8.7	26	17.3	13.0	10.4	8.7	6.5	
	40	M	M	0.40	40	26	19.8	15.8	13.2	9.9	30	19.8	14.9	11.9	9.9	7.4	
	60	F	F	0.49	49	32	24	19.4	16.2	12.1	36	24	18.2	14.6	12.1	9.1	
<b>05</b> (50)	30	M	M	0.43	43	28	21	17.0	14.2	10.6	32	21	16.0	12.8	10.6	8.0	
	40	M	M	0.50	50	33	25	19.8	16.5	12.4	37	25	18.6	14.9	12.4	9.3	
	60	M	M	0.61	60	40	30	24	20	15.1	45	30	23	18.1	15.1	11.3	
<b>06</b> (50)	30	C	C	0.52	51	34	26	21	17.2	12.9	39	26	19.3	15.4	12.9	9.7	
	40	M	M	0.60	59	40	30	24	19.8	14.9	45	30	22	17.8	14.9	11.1	
	60	M	M	0.73	72	48	36	29	24	18.1	54	36	27	22	18.1	13.6	

Note: Always double check your application rates. Droplet size classification shown is based on ISO 25358. Droplet size classification standard is subject to changes. Tabulations are based on spraying water at 70°F (21°C).



# TARGET SPRAY APPLICATIONS

AI TEEJET®

AIR INDUCTION FLAT SPRAY TIPS

## PERFECT SPRAY DISTRIBUTION WITH SUPERIOR DRIFT CONTROL

Available in 80° tapered and 65° even spray angles ideal for target spray application.\*

### Features & Benefits

- Produces larger droplets, significantly minimizing drift and keeping spray on target
- Air-filled droplets, due to the Venturi system, improve coverage efficiency, ensuring consistent application without compromising efficacy
- Minimizes chemical loss due to drift, saving costs and reducing environmental impact
- Available in stainless steel insert, polymer holder and pre-orifice with VisiFlo® color-coding



### USE WITH:

HERBICIDE  
SYSTEMIC  
EXCELLENT



VS

MATERIALS:  
STAINLESS STEEL



### SPRAY ANGLE:

AI 80° TAPERED  
AI 65° EVEN



PRESSURE:  
30 - 115 PSI



### SPRAY PATTERN:

TAPERED AND EVEN

### DROP SIZE CLASSIFICATION:



C  
Coarse



VC  
Very  
Coarse





XC  
Extremely  
Coarse



UC  
Ultra  
Coarse



# AI APPLICATION CHART

	 PSI	DROP SIZE		CAPACITY ONE NOZZLE IN GPM	GALLONS PER ACRE (GPA)						GALLONS PER ACRE (GPA)					
		65° E	80°		15"						20"					
					4 MPH	6 MPH	8 MPH	10 MPH	12 MPH	16 MPH	4 MPH	6 MPH	8 MPH	10 MPH	12 MPH	16 MPH
015 (100)	30	-	XC	0.13	12.9	8.6	6.4	5.1	4.3	3.2	9.7	6.4	4.8	3.9	3.2	2.4
	40	-	XC	0.15	14.9	9.9	7.4	5.9	5.0	3.7	11.1	7.4	5.6	4.5	3.7	2.8
	50	-	VC	0.17	16.8	11.2	8.4	6.7	5.6	4.2	12.6	8.4	6.3	5.0	4.2	3.2
	60	-	VC	0.18	17.8	11.9	8.9	7.1	5.9	4.5	13.4	8.9	6.7	5.3	4.5	3.3
	70	-	VC	0.20	19.8	13.2	9.9	7.9	6.6	5.0	14.9	9.9	7.4	5.9	5.0	3.7
	80	-	C	0.21	21	13.9	10.4	8.3	6.9	5.2	15.6	10.4	7.8	6.2	5.2	3.9
	90	-	C	0.23	23	15.2	11.4	9.1	7.6	5.7	17.1	11.4	8.5	6.8	5.7	4.3
02 (50)	30	UC	XC	0.17	16.8	11.2	8.4	6.7	5.6	4.2	12.6	8.4	6.3	5.0	4.2	3.2
	40	XC	XC	0.20	19.8	13.2	9.9	7.9	6.6	5.0	14.9	9.9	7.4	5.9	5.0	3.7
	50	XC	VC	0.22	22	14.5	10.9	8.7	7.3	5.4	16.3	10.9	8.2	6.5	5.4	4.1
	60	VC	VC	0.24	24	15.8	11.9	9.5	7.9	5.9	17.8	11.9	8.9	7.1	5.9	4.5
	70	VC	VC	0.26	26	17.2	12.9	10.3	8.6	6.4	19.3	12.9	9.7	7.7	6.4	4.8
	80	VC	VC	0.28	28	18.5	13.9	11.1	9.2	6.9	21	13.9	10.4	8.3	6.9	5.2
	90	VC	C	0.30	30	19.8	14.9	11.9	9.9	7.4	22	14.9	11.1	8.9	7.4	5.6
025 (50)	30	UC	XC	0.22	22	14.5	10.9	8.7	7.3	5.4	16.3	10.9	8.2	6.5	5.4	4.1
	40	XC	XC	0.25	25	16.5	12.4	9.9	8.3	6.2	18.6	12.4	9.3	7.4	6.2	4.6
	50	XC	VC	0.28	28	18.5	13.9	11.1	9.2	6.9	21	13.9	10.4	8.3	6.9	5.2
	60	VC	VC	0.31	31	20	15.3	12.3	10.2	7.7	23	15.3	11.5	9.2	7.7	5.8
	70	VC	VC	0.33	33	22	16.3	13.1	10.9	8.2	25	16.3	12.3	9.8	8.2	6.1
	80	VC	VC	0.35	35	23	17.3	13.9	11.6	8.7	26	17.3	13.0	10.4	8.7	6.5
	90	VC	C	0.38	38	25	18.8	15.0	12.5	9.4	28	18.8	14.1	11.3	9.4	7.1
03 (50)	30	UC	XC	0.26	26	17.2	12.9	10.3	8.6	6.4	19.3	12.9	9.7	7.7	6.4	4.8
	40	XC	XC	0.30	30	19.8	14.9	11.9	9.9	7.4	22	14.9	11.1	8.9	7.4	5.6
	50	XC	VC	0.34	34	22	16.8	13.5	11.2	8.4	25	16.8	12.6	10.1	8.4	6.3
	60	VC	VC	0.37	37	24	18.3	14.7	12.2	9.2	27	18.3	13.7	11.0	9.2	6.9
	70	VC	VC	0.40	40	26	19.8	15.8	13.2	9.9	30	19.8	14.9	11.9	9.9	7.4
	80	VC	VC	0.42	42	28	21	16.6	13.9	10.4	31	21	15.6	12.5	10.4	7.8
	90	VC	C	0.45	45	30	22	17.8	14.9	11.1	33	22	16.7	13.4	11.1	8.4
04 (50)	30	UC	XC	0.35	35	23	17.3	13.9	11.6	8.7	26	17.3	13.0	10.4	8.7	6.5
	40	XC	XC	0.40	40	26	19.8	15.8	13.2	9.9	30	19.8	14.9	11.9	9.9	7.4
	50	XC	VC	0.45	45	30	22	17.8	14.9	11.1	33	22	16.7	13.4	11.1	8.4
	60	VC	VC	0.49	49	32	24	19.4	16.2	12.1	36	24	18.2	14.6	12.1	9.1
	70	VC	VC	0.53	52	35	26	21	17.5	13.1	39	26	19.7	15.7	13.1	9.8
	80	VC	VC	0.57	56	38	28	23	18.8	14.1	42	28	21	16.9	14.1	10.6
	90	C	C	0.60	59	40	30	24	19.8	14.9	45	30	22	17.8	14.9	11.1
05 (50)	30	UC	XC	0.43	43	28	21	17.0	14.2	10.6	32	21	16.0	12.8	10.6	8.0
	40	XC	XC	0.50	50	33	25	19.8	16.5	12.4	37	25	18.6	14.9	12.4	9.3
	50	XC	VC	0.56	55	37	28	22	18.5	13.9	42	28	21	16.6	13.9	10.4
	60	XC	VC	0.61	60	40	30	24	20	15.1	45	30	23	18.1	15.1	11.3
	70	VC	VC	0.66	65	44	33	26	22	16.3	49	33	25	19.6	16.3	12.3
	80	VC	VC	0.71	70	47	35	28	23	17.6	53	35	26	21	17.6	13.2
	90	VC	C	0.75	74	50	37	30	25	18.6	56	37	28	22	18.6	13.9
06 (50)	30	UC	XC	0.52	51	34	26	21	17.2	12.9	39	26	19.3	15.4	12.9	9.7
	40	XC	XC	0.60	59	40	30	24	19.8	14.9	45	30	22	17.8	14.9	11.1
	50	XC	XC	0.67	66	44	33	27	22	16.6	50	33	25	19.9	16.6	12.4
	60	XC	VC	0.73	72	48	36	29	24	18.1	54	36	27	22	18.1	13.6
	70	XC	VC	0.79	78	52	39	31	26	19.6	59	39	29	23	19.6	14.7
	80	VC	VC	0.85	84	56	42	34	28	21	63	42	32	25	21	15.8
	90	VC	VC	0.90	89	59	45	36	30	22	67	45	33	27	22	16.7

Note: Always double check your application rates. Droplet size classification shown is based on ISO 25358. Droplet size classification standard is subject to changes. Tabulations are based on spraying water at 70°F (21°C).

## HOW TO ORDER

Stainless Steel with VisiFlo color-coding

AI 8004VS

Tip Spray Capacity Material  
Type Angle Size Code

Stainless Steel with VisiFlo color-coding

A16504EVS

Tip Capacity Spray Material  
Type Size Pattern Code

# TARGET SPRAY APPLICATION

## TEEJET® NOZZLE BODIES & ACCESSORIES



191500  
DYNAJET®  
VALVE



116950  
ECOSTOP™  
VALVE



116280  
DYNAJET®  
HIGH FLOW  
VALVE

DynaJet valves are a solenoid-actuated shutoff compatible with a wide range of TeeJet® nozzle bodies equipped with a diaphragm check valve. It is primarily intended to use with PWM control systems. EcoStop valve is designed for tip shutoff in individual nozzle control applications, such as Target Spraying.



QJS



24216A



QJ17560A



QJ-PTC




QJ22187

\* For more details, see the latest TeeJet Catalog or visit [www.teejet.com](http://www.teejet.com)

## QJ30 QUICK TEEJET® 30° OUTLET ADAPTER

- Optimized flow passage for improved spray tip shut-off performance and clean out
- Nylon body construction for strength and durability, with EPDM gasket (FKM Optional)
- Lugs are designed to maintain parallel alignment of spray pattern and the boom
- Fits standard Quick TeeJet nozzle bodies for easy use
- Maximum pressure: 300 PSI

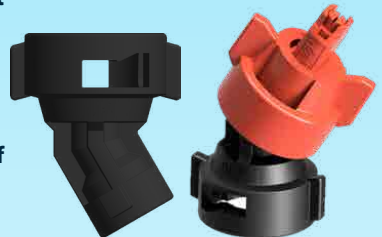



# SPRAY TIPS AVAILABLE FOR TARGET SPRAY APPLICATION

## Tapered

### 15°

TP150025-SS  
 TP150033-SS  
 TP150050-SS  
 TP150067-SS  
 TP1501-SS  
 TP15015-SS  
 TP1502-SS  
 TP1503-SS  
 TP1504-SS  
 TP1505-SS  
 TP1506-SS  
 TP1508-SS

### 25°

TP250025-SS  
 TP250033-SS  
 TP250050-SS  
 TP250067-SS  
 TP2501-SS  
 TP25015-SS  
 TP2502-SS  
 TP2503-SS  
 TP2504-SS  
 TP2505-SS  
 TP25055-SS  
 TP2506-SS  
 TP2508-SS

### 30°

TP3003-SS  
 TP3004-SS  
 TP3005-SS  
 DG3003-SS  
 DG3004-SS  
40°  
 TP400025-SS  
 TP400033-SS  
 TP400050-SS  
 TP400067-SS  
 TP4001-SS  
 TP40015-SS  
 TP4002-SS  
 TP4003-SS  
 TP4004-SS  
 TP4005-SS  
 TP4006-SS  
 TP4008-SS  
 DG4003-SS  
 DG4004-SS  
 DGX4003SS  
 DGX4004SS  
 DGX4005SS  
 DGX4006SS  
50°  
 TP500025-SS  
 TP500033-SS  
 TP500050-SS  
 TP500067-SS

TP5001-SS  
 TP50015-SS  
 TP5002-SS  
 TP5003-SS  
 TP5004-SS  
 TP5005-SS  
 TP5006-SS  
 TP5008-SS  
65°  
 TP650025-SS  
 TP650033-SS  
 TP650050-SS  
 TP650067-SS  
 TP6501-SS  
 TP65015-SS  
 TP6502-SS  
 TP65025-SS  
 TP6503-SS  
 TP6504-SS  
 TP6505-SS  
 TP6506-SS  
 TP6508-SS  
 DG65055-SS  
 DGX6503SS  
 DGX6504SS  
 DGX6505SS  
 DGX6506SS  
80°  
 TP800050-SS  
 TP800067-SS  
 TP8001-SS

TP80015-SS  
 TP8002-SS  
 TP8003-SS  
 TP8004-SS  
 TP8005-SS  
 TP8006-SS  
 TP8008-SS  
 DG80015VS  
 DG8002VS  
 DG8003VS  
 DG8004VS  
 DG8005VS  
 AI80015VS  
 AI8002VS  
 AI8003VS  
 AI8004VS  
 AI8005VS  
 AI8006VS  
 AIXR80015VK  
 AIXR8002VK  
 AIXR80025VK  
 AIXR8003VK  
 AIXR8004VK  
 AIXR8005VK  
95°  
 TP950050-SS  
 TP950067-SS  
 TP9501-SS  
 TP9502-SS  
 TP95025-SS  
 TP9503-SS  
 TP9504-SS

TP9505-SS  
 TP9506-SS  
 TP9508-SS  
110°  
 TP1100033-SS  
 TP1100050-SS  
 TP1100067-SS  
 TP11001-SS  
 TP110015-SS  
 TP11002-SS  
 TP110025-SS  
 TP11003-SS  
 TP11004-SS  
 TP11005-SS  
 TP11006-SS  
 TP11008-SS  
 AIXR110015VP  
 AIXR11002VP  
 AIXR110025VP  
 AIXR11003VP  
 AIXR11004VP  
 AIXR11005VP  
 AIXR11006VP  
 AIXR11008VP  
 AIXR110015VK  
 AIXR11002VK  
 AIXR110025VK  
 AIXR11003VK  
 AIXR11004VK  
 AIXR11005VK  
 AIXR11006VK

## Even

### 30°

TP3002E-SS  
 TP3003E-SS  
40°  
 TP4001E-SS  
 TP40015E-SS  
 TP4002E-SS  
 TP4003E-SS  
 TP4004E-SS  
 TP4005E-SS  
 TP4006E-SS

### 50°

TP5001E-SS  
 TP50015E-SS  
 TP5002E-SS  
 TP5003E-SS  
 TP5004E-SS  
 TP5005E-SS  
 TP5006E-SS

### 65°

TP6501E-SS  
 TP65015E-SS  
 TP6502E-SS  
 TP6503E-SS  
 TP6504E-SS  
 TP6505E-SS  
 TP6506E-SS  
 TP6508E-SS  
 AI6502EVS  
 AI65025EVS  
 AI6503EVS

### AI6504EVS

AI6505EVS  
 AI6506EVS  
80°  
 TP8001E-SS  
 TP80015E-SS  
 TP8002E-SS  
 TP8003E-SS  
 TP8004E-SS  
 TP8005E-SS  
 TP8006E-SS  
 TP8008E-SS

### 95°

TP9501EVS  
 TP95015EVS  
 TP9502EVS  
 TPU9503EVS  
 TP9504EVS  
 TPU9505EVS  
 TP9506EVS  
 TP9508EVS

Additional capacities and spray angles may be available. Contact your TeeJet representative for more information



*TeeJet*<sup>®</sup>  
TECHNOLOGIES

