


1/4 TT-SS+TG-SS-W TEEJET NOZZLE  
WITH TG-W WIDE SPRAY FULLCONE TIP

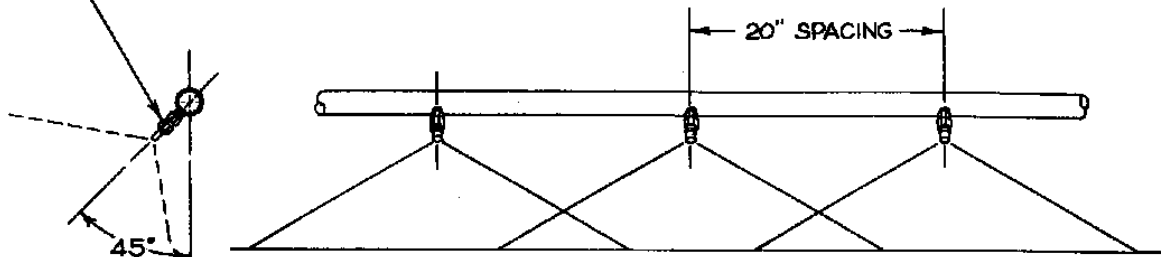

SUGGESTED  
MOUNTING

NOZZLE MATERIAL—STAINLESS STEEL

TIP NO.	LIQUID PRESSURE IN PSI	CAPACITY 1-NOZZLE IN GPM	GALLONS PER 1000 SQ. FT.			
			3 MPH	4 MPH	5 MPH	6 MPH
TG-SS8W	20	1.1	2.5	1.8	1.5	1.2
	30	1.3	2.9	2.2	1.8	1.5
	40	1.5	3.3	2.5	2.0	1.7
	50	1.6	3.7	2.8	2.2	1.8
TG-SS10W	20	1.4	3.1	2.3	1.9	1.5
	30	1.6	3.7	2.8	2.2	1.8
	40	1.8	4.2	3.1	2.5	2.1
	50	2.0	4.6	3.5	2.8	2.3
TG-SS12W	20	1.6	3.7	2.8	2.2	1.9
	30	1.9	4.4	3.3	2.7	2.2
	40	2.2	5.0	3.8	3.0	2.5
	50	2.4	5.5	4.2	3.3	2.8
TG-SS14W	20	1.9	4.3	3.2	2.6	2.2
	30	2.3	5.2	3.9	3.1	2.6
	40	2.6	5.9	4.4	3.5	2.9
	50	2.8	6.5	4.8	3.9	3.2

TABULATION IS BASED ON SPRAYING WATER AT TEMPERATURE OF 70°F

**DESCRIPTION:**

GALLONS PER 1000 SQ. FT.  
USING TEEJET NOZZLE  
WITH TG-SS-W SPRAY TIPS



**Spraying Systems Co.®**

Spray Nozzles and Accessories  
P.O. Box 7900 - Wheaton, Il. 60189-7900

Rev. No.

Data Sheet No.

**19639**

Ref.

SHEET OF