


## TTI TWINJET<sup>®</sup>

### 공기 유도 방식 TWIN FLAT 스프레이 노즐

The TTI60 공기 유도식 TeeJet Twin Flat 스프레이 노즐은 향상된 커버리지 및 최대 비산 조절을 통한 큰 입자의 물방울을 생산합니다. 단일 노즐 & 캡 디자인은 다른 twin spray 노즐과는 다르게 작은 사이즈로 쉽고 빠른 설치가 가능합니다. TTI60 스프레이 노즐은 발아 전 제초와 침투성 제초에 이상적입니다.

#### 제

- TTI60  
110°
- 60°
- Quick TeeJet<sup>®</sup>
- Venturi
- 1.5%\*
- 20- 100 PSI (1.5- 7 bar)

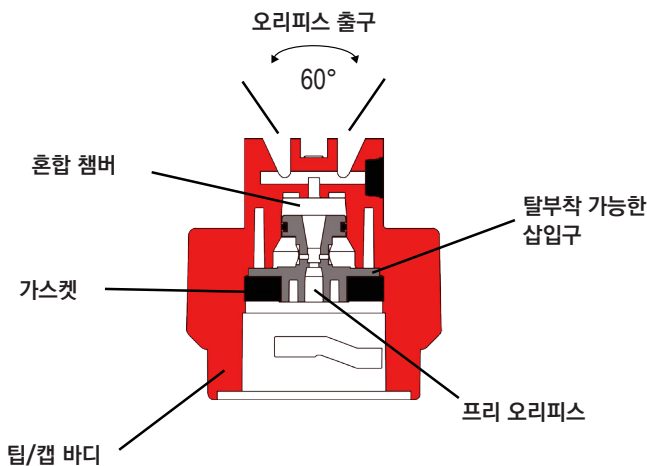

TTI60 단면도


#### TTI60 스프레이 노즐



#### 액적 크기와 커버리지



TURBO TEEJET<sup>®</sup> (TT)  
(M Droplets)



TTI TWINJET<sup>®</sup> (TTI60)  
(XC Droplets)

#### 선택 가이드

사용 제품	침투성 제품	비산 관리
N/A	훌륭함	훌륭함

\* -04 capacity spraying water at 40 PSI (2.8 bar). Driftable fines defined as droplets smaller than 150 microns.

## APPLICATION INFORMATION

TIPOLOGY	PSI	DROP SIZE	CAPACITY ONE NOZZLE IN GPM	20"															
				GPA															
				6 MPH	6.5 MPH	7 MPH	7.5 MPH	8 MPH	9 MPH	10 MPH	11 MPH	12 MPH	13 MPH	14 MPH	15 MPH	20 MPH			
TTI60-11002VP (50)	20 UC	0.14	6.9	6.4	5.9	5.5	5.2	4.6	4.2	3.8	3.5	3.2	3.0	2.8	2.1				
	30 UC	0.17	8.4	7.8	7.2	6.7	6.3	5.6	5.0	4.6	4.2	3.9	3.6	3.4	2.5				
	40 XC	0.20	9.9	9.1	8.5	7.9	7.4	6.6	5.9	5.4	5.0	4.6	4.2	4.0	3.0				
	50 XC	0.22	10.9	10.1	9.3	8.7	8.2	7.3	6.5	5.9	5.4	5.0	4.7	4.4	3.3				
	60 VC	0.24	11.9	11.0	10.2	9.5	8.9	7.9	7.1	6.5	5.9	5.5	5.1	4.8	3.6				
	70 VC	0.26	12.9	11.9	11.0	10.3	9.7	8.6	7.7	7.0	6.4	5.9	5.5	5.1	3.9				
	80 VC	0.28	13.9	12.8	11.9	11.1	10.4	9.2	8.3	7.6	6.9	6.4	5.9	5.5	4.2				
	90 VC	0.30	14.9	13.7	12.7	11.9	11.1	9.9	8.9	8.1	7.4	6.9	6.4	5.9	4.5				
	TTI60-110025VP (50)	20 UC	0.18	8.9	8.2	7.6	7.1	6.7	5.9	5.3	4.9	4.5	4.1	3.8	3.6	2.7			
30 UC	0.22	10.9	10.1	9.3	8.7	8.2	7.3	6.5	5.9	5.4	5.0	4.7	4.4	3.3					
40 XC	0.25	12.4	11.4	10.6	9.9	9.3	8.3	7.4	6.8	6.2	5.7	5.3	5.0	3.7					
50 XC	0.28	13.9	12.8	11.9	11.1	10.4	9.2	8.3	7.6	6.9	6.4	5.9	5.5	4.2					
60 VC	0.31	15.3	14.2	13.2	12.3	11.5	10.2	9.2	8.4	7.7	7.1	6.6	6.1	4.6					
70 VC	0.33	16.3	15.1	14.0	13.1	12.3	10.9	9.8	8.9	8.2	7.5	7.0	6.5	4.9					
80 VC	0.35	17.3	16.0	14.9	13.9	13.0	11.6	10.4	9.5	8.7	8.0	7.4	6.9	5.2					
90 VC	0.38	18.8	17.4	16.1	15.0	14.1	12.5	11.3	10.3	9.4	8.7	8.1	7.5	5.6					
TTI60-11003VP (50)	20 UC	0.21	10.4	9.6	8.9	8.3	7.8	6.9	6.2	5.7	5.2	4.8	4.5	4.2	3.1				
	30 UC	0.26	12.9	11.9	11.0	10.3	9.7	8.6	7.7	7.0	6.4	5.9	5.5	5.1	3.9				
	40 UC	0.30	14.9	13.7	12.7	11.9	11.1	9.9	8.9	8.1	7.4	6.9	6.4	5.9	4.5				
	50 UC	0.34	16.8	15.5	14.4	13.5	12.6	11.2	10.1	9.2	8.4	7.8	7.2	6.7	5.0				
	60 XC	0.37	18.3	16.9	15.7	14.7	13.7	12.2	11.0	10.0	9.2	8.5	7.8	7.3	5.5				
	70 XC	0.40	19.8	18.3	17.0	15.8	14.9	13.2	11.9	10.8	9.9	9.1	8.5	7.9	5.9				
	80 VC	0.42	21	19.2	17.8	16.6	15.6	13.9	12.5	11.3	10.4	9.6	8.9	8.3	6.2				
	90 VC	0.45	22	21	19.1	17.8	16.7	14.9	13.4	12.2	11.1	10.3	9.5	8.9	6.7				
	TTI60-11004VP (50)	20 UC	0.28	13.9	12.8	11.9	11.1	10.4	9.2	8.3	7.6	6.9	6.4	5.9	5.5	4.2			
30 UC	0.35	17.3	16.0	14.9	13.9	13.0	11.6	10.4	9.5	8.7	8.0	7.4	6.9	5.2					
40 UC	0.40	19.8	18.3	17.0	15.8	14.9	13.2	11.9	10.8	9.9	9.1	8.5	7.9	5.9					
50 UC	0.45	22	21	19.1	17.8	16.7	14.9	13.4	12.2	11.1	10.3	9.5	8.9	6.7					
60 XC	0.49	24	22	21	19.4	18.2	16.2	14.6	13.2	12.1	11.2	10.4	9.7	7.3					
70 XC	0.53	26	24	22	21	19.7	17.5	15.7	14.3	13.1	12.1	11.2	10.5	7.9					
80 VC	0.57	28	26	24	23	21	18.8	16.9	15.4	14.1	13.0	12.1	11.3	8.5					
90 VC	0.60	30	27	25	24	22	19.8	17.8	16.2	14.9	13.7	12.7	11.9	8.9					
TTI60-11005VP (50)	20 UC	0.35	17.3	16.0	14.9	13.9	13.0	11.6	10.4	9.5	8.7	8.0	7.4	6.9	5.2				
	30 UC	0.43	21	19.6	18.2	17.0	16.0	14.2	12.8	11.6	10.6	9.8	9.1	8.5	6.4				
	40 UC	0.50	25	23	21	19.8	18.6	16.5	14.9	13.5	12.4	11.4	10.6	9.9	7.4				
	50 UC	0.56	28	26	24	22	21	18.5	16.6	15.1	13.9	12.8	11.9	11.1	8.3				
	60 XC	0.61	30	28	26	24	23	20	18.1	16.5	15.1	13.9	12.9	12.1	9.1				
	70 XC	0.66	33	30	28	26	25	22	19.6	17.8	16.3	15.1	14.0	13.1	9.8				
	80 VC	0.71	35	32	30	28	26	23	21	19.2	17.6	16.2	15.1	14.1	10.5				
	90 VC	0.75	37	34	32	30	28	25	22	20	18.6	17.1	15.9	14.9	11.1				
	TTI60-11006VP (50)	20 UC	0.42	21	19.2	17.8	16.6	15.6	13.9	12.5	11.3	10.4	9.6	8.9	8.3	6.2			
30 UC	0.52	26	24	22	21	19.3	17.2	15.4	14.0	12.9	11.9	11.0	10.3	7.7					
40 UC	0.60	30	27	25	24	22	19.8	17.8	16.2	14.9	13.7	12.7	11.9	8.9					
50 UC	0.67	33	31	28	27	25	22	19.9	18.1	16.6	15.3	14.2	13.3	9.9					
60 XC	0.73	36	33	31	29	27	24	22	19.7	18.1	16.7	15.5	14.5	10.8					
70 XC	0.79	39	36	34	31	29	26	23	21	19.6	18.0	16.8	15.6	11.7					
80 XC	0.85	42	39	36	34	32	28	25	23	21	19.4	18.0	16.8	12.6					
90 XC	0.90	45	41	38	36	33	30	27	24	22	21	19.1	17.8	13.4					
TTI60-11008VP (50)	20 UC	0.57	28	26	24	23	21	18.8	16.9	15.4	14.1	13.0	12.1	11.3	8.5				
	30 UC	0.69	34	32	29	27	26	23	20	18.6	17.1	15.8	14.6	13.7	10.2				
	40 UC	0.80	40	37	34	32	30	26	24	22	19.8	18.3	17.0	15.8	11.9				
	50 UC	0.89	44	41	38	35	33	29	26	24	22	20	18.9	17.6	13.2				
	60 UC	0.98	49	45	42	39	36	32	29	26	24	22	21	19.4	14.6				
	70 UC	1.06	52	48	45	42	39	35	31	29	26	24	22	21	15.7				
	80 UC	1.13	56	52	48	45	42	37	34	31	28	26	24	22	16.8				
	90 XC	1.20	59	55	51	48	45	40	36	32	30	27	25	24	17.8				

Note: Always double check your application rates. Tabulations are based on spraying water at 70°F (21°C).



<b>XF</b> EXTREMELY FINE	<b>VF</b> VERY FINE	<b>F</b> FINE	<b>M</b> MEDIUM	<b>C</b> COARSE	<b>VC</b> VERY COARSE	<b>XC</b> EXTREMELY COARSE	<b>UC</b> ULTRA COARSE	<b>Droplet Size Categories</b> may vary with nozzle capacity, spray angle and spray pressure
-----------------------------	------------------------	------------------	--------------------	--------------------	--------------------------	-------------------------------	---------------------------	--

### How To Order:

Example:

PART NUMBER	DESCRIPTION
TTI60-11002VP	Polymer with VisiFlo® color-coding

### OPTIMUM SPRAY HEIGHT

	
110°	20"

