


**CONE  
SPRAY PATTERN**

THIS NOZZLE CAN ALSO BE SUPPLIED WITH A STANDARD TEEJET STRAINER AS SHOWN ON DATA SHEET 5200-Y.

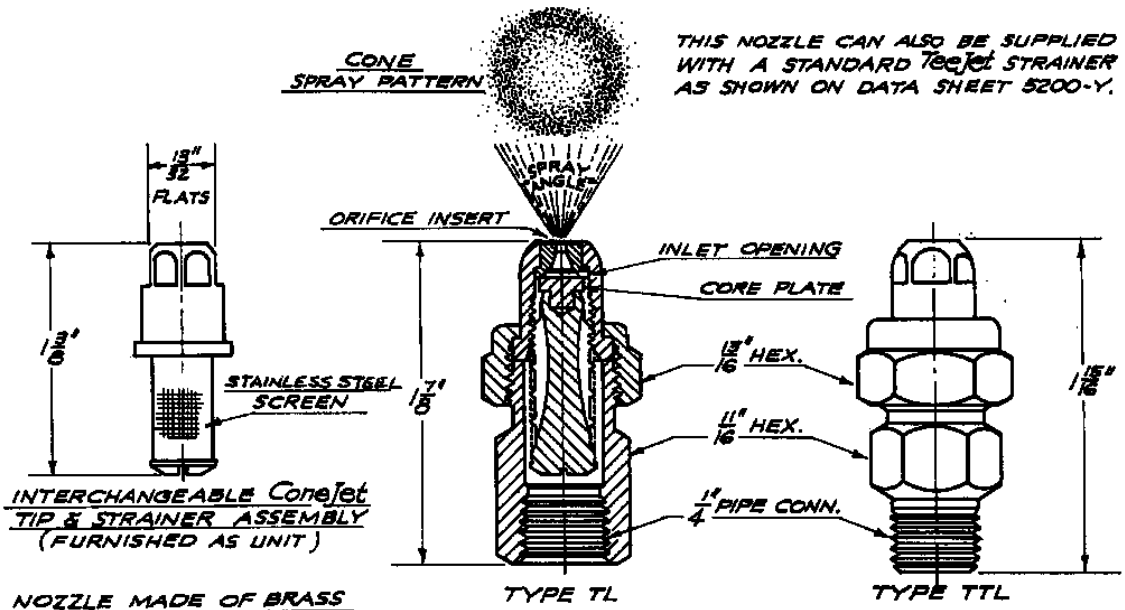

NOZZLE NO.		INLET OPENINGS	ORI-FICE OF DIA.	MESH OF SCREEN	CAPACITY IN G.P.H. (Gallons Per Hour) & SPRAY ANGLE AT p.s.i. (Lbs. per square inch)												
TYPE T FEMALE CONN.	TYPE TT MALE CONN.				15	20	25	30	40	60	80	100	150	200	300	400	
1/4 TLY1	1/4 TTLY1	ONE .020 X .018	.016"	100					1.0	1.2	1.3	1.5	1.7	1.9	2.3	2.6	
1/4 TLY125	1/4 TTLY125	ONE .024 X .020	.018"	100				1.1	1.25	1.3	1.5	1.7	1.8	2.2	2.5	2.8	
1/4 TLY15	1/4 TTLY15	ONE .024 X .024	.021"	100			1.2	1.3	1.5	1.8	2.0	2.2	2.5	2.8	3.5	3.8	
1/4 TLY2	1/4 TTLY2	ONE .032 X .029	.025"	100	1.5	1.6	1.8	2.0	2.2	2.5	2.7	3.0	3.6	4.0	4.8	5.5	
1/4 TLY25	1/4 TTLY25	ONE .040 X .036	.028"	100	1.8	2.0	2.2	2.5	3.0	3.4	3.7	4.2	5.0	6.0	6.8	7.8	
1/4 TLY3	1/4 TTLY3	TWO .032 X .028	.030"	100	2.2	2.4	2.6	3.0	3.6	4.1	4.5	5.3	6.1	7.2	8.2	9.5	
1/4 TLY4	1/4 TTLY4	TWO .040 X .032	.033"	50	2.9	3.2	3.5	4.0	4.8	5.5	6.1	7.3	8.3	10.0	11.4	13.0	
1/4 TLY5	1/4 TTLY5	TWO .040 X .034	.037"	50	3.2	3.6	4.0	4.4	5.0	6.0	6.9	7.8	9.1	10.4	12.5	14.3	
1/4 TLY6	1/4 TTLY6	TWO .036 X .040	.041"	50	3.5	4.4	4.9	5.5	6.0	7.5	8.2	9.1	11.0	12.5	15.0	17.1	
1/4 TLY8	1/4 TTLY8	TWO .050 X .031	.047"	50	5.0	5.7	6.4	7.0	8.0	9.7	11.1	12.4	15.0	17.3	21	24	
1/4 TLY10	1/4 TTLY10	TWO .050 X .035	.050"	50	6.3	7.2	8.0	8.7	10.0	12.1	13.9	15.5	18.9	21.6	26.3	30.1	
1/4 TLY12	1/4 TTLY12	TWO .060 X .030	.057"	50	7.5	8.6	9.6	10.5	12.0	14.6	16.7	18.6	22.6	25.9	31.4	36.1	
1/4 TLY14	1/4 TTLY14	TWO .060 X .033	.059"	50	8.6	9.9	11.1	12.1	14.0	17.1	19.7	22.1	27	31.1	38	43.9	
1/4 TLY18	1/4 TTLY18	TWO .070 X .030	.067"	50	11.1	12.8	14.3	15.6	18.0	22.0	25.4	28.4	34.7	40.0	49.9	58.4	
1/4 TLY22	1/4 TTLY22	TWO .075 X .030	.073"	50	13.5	15.6	17.4	18.1	22.0	26.9	31.0	34.7	42.4	49.9	59.8	69.9	
1/4 TLY26	1/4 TTLY26	TWO .075 X .034	.081"	50	16.0	18.4	20.6	22.5	26.0	31.8	36.7	41.0	50.1	57.8	70.6	81.5	

TABULATION IS BASED ON WATER AT TEMPERATURE OF 70°F. FOR SPRAYING WATER WITH WETTING AGENT SEE DATA SHEET 5402-Y.

**DESCRIPTION:**

1/4 TLY-- AND 1/4 TTLY--  
TEEJET SPRAY NOZZLES  
WITH CONEJET TIPS  
"LY" SERIES  
(65 DEGREE SPRAY ANGLE  
AT 100 PSI)



**Spraying Systems Co.®**

Spray Nozzles and Accessories  
P.O. Box 7900 - Wheaton, Il. 60189-7900

Rev. No.

Data Sheet No.

**5202-Y**

Ref.

SHEET OF