

/// **THE ULTIMATE  
DRIFT CONTROL SPRAY TIP™**

TTI11004-VP




# TURBO TEEJET® INDUCTION

## FLAT SPRAY TIPS

### Features and Benefits

- Flat spray nozzle with air induction technology for pressures of 15-100 PSI
- Provides excellent drift control and produces <2% driftable fines\*
- Depending on the chemical, TTI produces large air filled drops through a Venturi air aspirator, resulting in less drift
- Ideal for systemic and soil-applied herbicides and broadcast, non-foliar fertilizers
- Large, round, passages and orifices to minimize plugging and improve wear life
- Easy to remove pre-orifice for quick maintenance
- Short, compact construction reduces risk of damage to the orifice
- 01 to 10 capacity choices
- Automatic alignment with 114443A\_-CELR Quick TeeJet® cap and gasket for capacities 01 -06; 114502A\_-CELR for capacities 08 & 10
- Alternate Quick TeeJet® cap and gasket available is 115835A\_-CELR for capacities 01-06. This cap allows for straight through assembly of TTI tip into cap, with no need to rotate the tip 90° while inserting into cap

### Cross-Section View

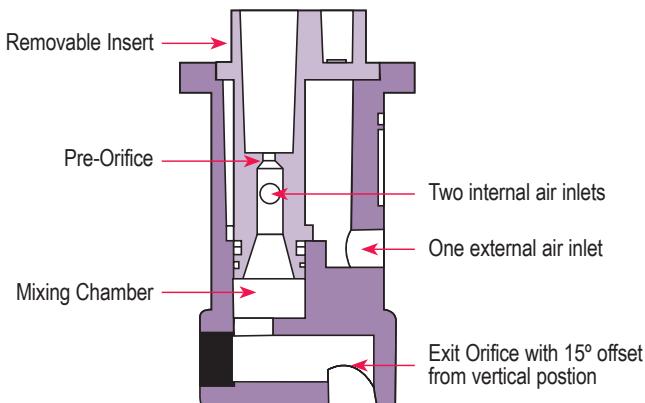

**TTI Cap Assembly -  
TTI11004-VP-CE**

### Selection Guide

CONTACT PRODUCT	SYSTEMIC PRODUCT	DRIFT MANAGEMENT
N/A	EXCELLENT	EXCELLENT

\* Driftable droplets defined as less than 150 microns. Based on spraying water at 40 PSI.

## APPLICATION INFORMATION

	PSI	DROP SIZE	CAPACITY ONE NOZZLE IN GPM	CAPACITY ONE NOZZLE IN OZ/MIN	20°														
					GPA										GALLONS PER 1000 SQ. FT.				
					4 MPH	5 MPH	6 MPH	8 MPH	10 MPH	12 MPH	14 MPH	16 MPH	20 MPH	2 MPH	3 MPH	4 MPH	5 MPH		
TTI11001-VP (100)	15	UC	0.061	7.8	4.5	3.6	3.0	2.3	1.8	1.5	1.3	1.1	0.9	0.21	0.14	0.10	0.083		
	20	UC	0.071	9.1	5.3	4.2	3.5	2.6	2.1	1.8	1.5	1.3	1.1	0.24	0.16	0.12	0.10		
	30	UC	0.087	11	6.5	5.2	4.3	3.2	2.6	2.2	1.8	1.6	1.3	0.30	0.20	0.15	0.12		
	40	XC	0.10	13	7.4	5.9	5.0	3.7	3.0	2.5	2.1	1.9	1.5	0.34	0.23	0.17	0.14		
	50	XC	0.11	14	8.2	6.5	5.4	4.1	3.3	2.7	2.3	2.0	1.6	0.37	0.25	0.19	0.15		
	60	VC	0.12	15	8.9	7.1	5.9	4.5	3.6	3.0	2.5	2.2	1.8	0.41	0.27	0.20	0.16		
	70	VC	0.13	17	9.7	7.7	6.4	4.8	3.9	3.2	2.8	2.4	1.9	0.44	0.29	0.22	0.18		
	80	VC	0.14	18	10.4	8.3	6.9	5.2	4.2	3.5	3.0	2.6	2.1	0.48	0.32	0.24	0.19		
	90	VC	0.15	19	11.1	8.9	7.4	5.6	4.5	3.7	3.2	2.8	2.2	0.51	0.34	0.26	0.20		
	100	C	0.16	20	11.9	9.5	7.9	5.9	4.8	4.0	3.4	3.0	2.4	0.54	0.36	0.27	0.22		
TTI110015-VP (100)	15	UC	0.092	12	6.8	5.5	4.6	3.4	2.7	2.3	2.0	1.7	1.4	0.31	0.21	0.16	0.13		
	20	UC	0.11	14	8.2	6.5	5.4	4.1	3.3	2.7	2.3	2.0	1.6	0.37	0.25	0.19	0.15		
	30	UC	0.13	17	9.7	7.7	6.4	4.8	3.9	3.2	2.8	2.4	1.9	0.44	0.29	0.22	0.18		
	40	XC	0.15	19	11.1	8.9	7.4	5.6	4.5	3.7	3.2	2.8	2.2	0.51	0.34	0.26	0.20		
	50	XC	0.17	22	12.6	10.1	8.4	6.3	5.0	4.2	3.6	3.2	2.5	0.58	0.39	0.29	0.23		
	60	XC	0.18	23	13.4	10.7	8.9	6.7	5.3	4.5	3.8	3.3	2.7	0.61	0.41	0.31	0.24		
	70	VC	0.20	26	14.9	11.9	9.9	7.4	5.9	5.0	4.2	3.7	3.0	0.68	0.45	0.34	0.27		
	80	VC	0.21	27	15.6	12.5	10.4	7.8	6.2	5.2	4.5	3.9	3.1	0.71	0.48	0.36	0.29		
	90	VC	0.23	29	17.1	13.7	11.4	8.5	6.8	5.7	4.9	4.3	3.4	0.78	0.52	0.39	0.31		
	100	VC	0.24	31	17.8	14.3	11.9	8.9	7.1	5.9	5.1	4.5	3.6	0.82	0.54	0.41	0.33		
TTI11002-VP (50)	15	UC	0.12	15	8.9	7.1	5.9	4.5	3.6	3.0	2.5	2.2	1.8	0.41	0.27	0.20	0.16		
	20	UC	0.14	18	10.4	8.3	6.9	5.2	4.2	3.5	3.0	2.6	2.1	0.48	0.32	0.24	0.19		
	30	UC	0.17	22	12.6	10.1	8.4	6.3	5.0	4.2	3.6	3.2	2.5	0.58	0.39	0.29	0.23		
	40	XC	0.20	26	14.9	11.9	9.9	7.4	5.9	5.0	4.2	3.7	3.0	0.68	0.45	0.34	0.27		
	50	XC	0.22	28	16.3	13.1	10.9	8.2	6.5	5.4	4.7	4.1	3.3	0.75	0.50	0.37	0.30		
	60	XC	0.24	31	17.8	14.3	11.9	8.9	7.1	5.9	5.1	4.5	3.6	0.82	0.54	0.41	0.33		
	70	VC	0.26	33	19.3	15.4	12.9	9.7	7.7	6.4	5.5	4.8	3.9	0.88	0.59	0.44	0.35		
	80	VC	0.28	36	21	16.6	13.9	10.4	8.3	6.9	5.9	5.2	4.2	0.95	0.63	0.48	0.38		
	90	VC	0.30	38	22	17.8	14.9	11.1	8.9	7.4	6.4	5.6	4.5	1.0	0.68	0.51	0.41		
	100	VC	0.32	41	24	19.0	15.8	11.9	9.5	7.9	6.8	5.9	4.8	1.1	0.73	0.54	0.44		
TTI110025-VP (50)	15	UC	0.15	19	11.1	8.9	7.4	5.6	4.5	3.7	3.2	2.8	2.2	0.51	0.34	0.26	0.20		
	20	UC	0.18	23	13.4	10.7	8.9	6.7	5.3	4.5	3.8	3.3	2.7	0.61	0.41	0.31	0.24		
	30	UC	0.22	28	16.3	13.1	10.9	8.2	6.5	5.4	4.7	4.1	3.3	0.75	0.50	0.37	0.30		
	40	XC	0.25	32	18.6	14.9	12.4	9.3	7.4	6.2	5.3	4.6	3.7	0.85	0.57	0.43	0.34		
	50	XC	0.28	36	21	16.6	13.9	10.4	8.3	6.9	5.9	5.2	4.2	0.95	0.63	0.48	0.38		
	60	XC	0.31	40	23	18.4	15.3	11.5	9.2	7.7	6.6	5.8	4.6	1.1	0.70	0.53	0.42		
	70	VC	0.33	42	25	19.6	16.3	12.3	9.8	8.2	7.0	6.1	4.9	1.1	0.75	0.56	0.45		
	80	VC	0.35	45	26	21	17.3	13.0	10.4	8.7	7.4	6.5	5.2	1.2	0.79	0.60	0.48		
	90	VC	0.38	49	28	23	18.8	14.1	11.3	9.4	8.1	7.1	5.6	1.3	0.86	0.65	0.52		
	100	VC	0.40	51	30	24	19.8	14.9	11.9	9.9	8.5	7.4	5.9	1.4	0.91	0.68	0.54		
TTI11003-VP (50)	15	UC	0.18	23	13.4	10.7	8.9	6.7	5.3	4.5	3.8	3.3	2.7	0.61	0.41	0.31	0.24		
	20	UC	0.21	27	15.6	12.5	10.4	7.8	6.2	5.2	4.5	3.9	3.1	0.71	0.48	0.36	0.29		
	30	UC	0.26	33	19.3	15.4	12.9	9.7	7.7	6.4	5.5	4.8	3.9	0.88	0.59	0.44	0.35		
	40	XC	0.30	38	22	17.8	14.9	11.1	8.9	7.4	6.4	5.6	4.5	1.0	0.68	0.51	0.41		
	50	XC	0.34	44	25	20	16.8	12.6	10.1	8.4	7.2	6.3	5.0	1.2	0.77	0.58	0.46		
	60	XC	0.37	47	27	22	18.3	13.7	11.0	9.2	7.8	6.9	5.5	1.3	0.84	0.63	0.50		
	70	VC	0.40	51	30	24	19.8	14.9	11.9	9.9	8.5	7.4	5.9	1.4	0.91	0.68	0.54		
	80	VC	0.42	54	31	25	15.6	12.5	10.4	8.9	7.8	6.2	5.1	1.4	0.95	0.71	0.57		
	90	VC	0.45	58	33	27	16.7	13.4	11.1	9.5	8.4	7.6	6.7	1.5	1.0	0.77	0.61		
	100	VC	0.47	60	35	28	23	17.4	14.0	11.6	10.0	8.7	7.0	1.6	1.1	0.80	0.64		
TTI11004-VP (50)	15	UC	0.24	31	17.8	14.3	11.9	8.9	7.1	5.9	5.1	4.5	3.6	0.82	0.54	0.41	0.33		
	20	UC	0.28	36	21	16.3	13.9	10.4	8.3	6.9	5.9	5.2	4.2	0.95	0.63	0.48	0.38		
	30	UC	0.35	45	26	21	17.3	13.0	10.4	8.7	7.4	6.5	5.2	1.2	0.79	0.60	0.48		
	40	XC	0.40	51	30	24	19.8	14.9	11.9	9.9	8.5	7.4	5.9	1.4	0.91	0.68	0.54		
	50	XC	0.45	58	33	27	22	16.7	13.4	11.1	9.5	8.4	6.7	1.5	1.0	0.77	0.61		
	60	XC	0.49	63	36	29	24	18.2	14.6	12.1	10.4	9.1	7.3	1.7	1.1	0.83	0.67		
	70	VC	0.53	68	39	31	26	19.7	15.7	13.1	11.2	9.8	7.9	1.8	1.2	0.90	0.72		
	80	VC	0.57	73	42	34	28	21	16.9	14.1	12.1	10.6	8.5	1.9	1.3	0.97	0.78		
	90	VC	0.60	77	45	36	30	22	17.8	14.9	12.7	11.1	9.4	2.2	1.5	1.1	0.90		
	100	VC	0.63	81	47	37	31	23	18.7	15.6	13.4	11.7	11.7	2.7	1.8	1.3	1.1		
TTI11005-VP (50)	15	UC	0.31	40	23	18.4	15.3	11.5	9.2	7.7	6.6	5.8	4.6	1.1	0.70	0.53	0.42		
	20	UC	0.35	45	26	21	17.3	13.0	10.4	8.7	7.4	6.5	5.2	1.2	0.79	0.60	0.48		
	30	UC	0.43	55	32	26	16.0	12.8	10.6	9.1	8.0	6.4	5.1	0.97	0.73	0.58	0.48		
	40	XC	0.50	64	37	30	25	18.6	14.9	12.4	10.6	9.3	7.4	1.7	1.1	0.85	0.68		
	50	XC	0.56	72	42	33	28	21	16.6	13.9	11.9	10.4	8.3	1.9	1.3	0.95	0.76		
	60	XC	0.61	78	45	36	30	23	18.1	15.1	12.9	11.3	9.1	2.1	1.4	1.0	0.83		
	70	VC	0.66	84	49	39	33	25	19.6	16.3	14.0	12.3	9.8	2.2	1.5	1.1	0.90		
	80	VC	0.71	91	53	42	35	26	17.6	15.1	12.6	11.1	9.2	2.4	1.7	1.3	1.2		